

Distribution boxes AP Boxes for control devices and signals AC



The Company

INDUSTRIA LOMBARDA MATERIALE ELETTRICO SpA has been operating in Milan since 1945, in particular in the electrotechnical sector for the manufacturing of equipment for industrial installations. ILME reflects the traditional **entrepreneurial spirit of Lombardy**, and has enjoyed continuous expansion for over half a century. The company has carved an important role for itself in the main world markets, also operating directly in the countries that have assumed world leadership in the field of automation, including Germany and Japan. In the **electrical connection** sector with applications in industrial automation, characterised by **top performance** and utmost **reliability needs**, ILME is today the acknowledged partner of many leading companies worldwide. The company's fundamental values are: **product innovation**, original solutions, excellent **price-quality ratio**, a customer-oriented **sense of service**, ethical behaviour and an environmentally-friendly approach. To promote the continuing improvement of its **qualitative results**, ILME has always encouraged its collaborators to work with utmost **responsibility and participation**. The company focuses on a series of benefits to the user, including research into the most suitable materials, high quality and safe cabling, a rapid turnaround and readily available services.



CE marking

As from 1st January 1997, in order to make available electrical products on the European market, the manufacturer must ensure that these bear the relevant CE marking, in line with the Low Voltage Directive 73/23/EEC* (implemented in Italy as L. D. 18-10-1977 no. 791) and its modification 93/68/EEC* (implemented in Italy as L.D. 25-11-1996 no. 626/96, published in the supplement to the Gazzetta Ufficiale of 14-12-1996).

The CE marking must be visible on the product or, if this is not possible, on the packaging, the instructions for use or on the warranty certificate. It acts as a declaration by the manufacturer that the product complies with all relevant EU directives regarding its field of application.

ILME products bear the CE marking on the actual product or its packaging.

Almost all ILME products fall within the scope of the Low Voltage Directive. An EU declaration of conformity is required in order to be able to apply the CE marking. This declaration, to which the market is not directly entitled, must be made available to the controlling authorities (in Italy, the Ministry of Economic Development) at all times. In it, the manufacturer declares the technical safety standard(s) followed in the design and manufacture of the product. These standards must be, in decreasing order of preference:

- a European standard (EN prefix)
- a European harmonisation document (HD prefix)
- an international IEC standard
- a national standard
- in the absence of reference standards, the manufacturer's internal specifications guaranteeing compliance with the basic safety requirements of the directive.

Conformity with harmonised technical standards (i.e. ratified by CENELEC) also constitutes presumption of conformity with the basic safety requirements of the directives.

The CE marking of ILME products results from the declaration of conformity of the product to harmonised standards or international IEC standards.

Through the CE marking, ILME declares full compliance, not merely with the directive's basic safety requirements, but also with those international or national standards on which voluntary safety certification markings are based (e.g. IMQ and VDE). In this way, ILME intends to give the CE marking the value of self-certification in terms of safety, given the loss in legal value of voluntary certifications issued by third parties, ratified by directive 93/68/EEC*.

Notwithstanding the above, practically all ILME products still bear voluntary conformity markings.

The above mentioned EU declaration of conformity becomes null and void when the assembly of products includes one or more components not manufactured by ILME and without CE marking.

* **Note:** The next legal reference for the Low Voltage Directive was 2006/95/EC, as consolidation of the original Directive 73/23/EEC + Directive 93/68/EEC. On 29th March 2014, the Official Journal of the European Union published the new Low Voltage directive 2014/35/EU dd. 26th February 2014, a recast version of directive 2006/95/EC, which is in force since 20th April 2016.

All information contained in this catalogue is not binding and may be changed without notice.




UNI EN ISO 9001: 2015
Design, manufacture and distribution
of industrial electrical equipment (IAF 19)
Certificate No. 50 100 11133


Distribution boxes **APV / APS / APW** series

Boxes for control devices and signals **AC** series

APV

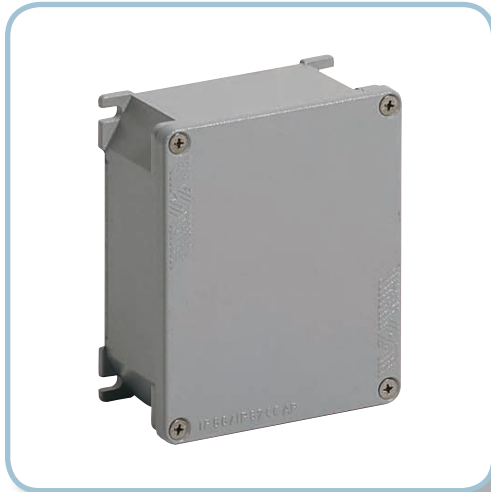

APS

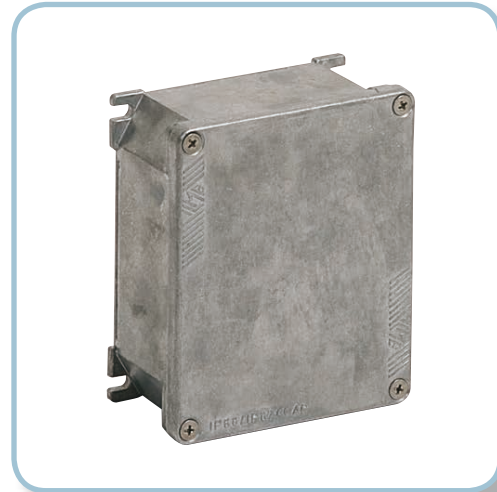

APW



AC




AP-AC series

Main Features

ILME has a long history of manufacturing die-cast aluminium alloy distribution boxes to meet industrial environment protection requirements.

AP SERIES

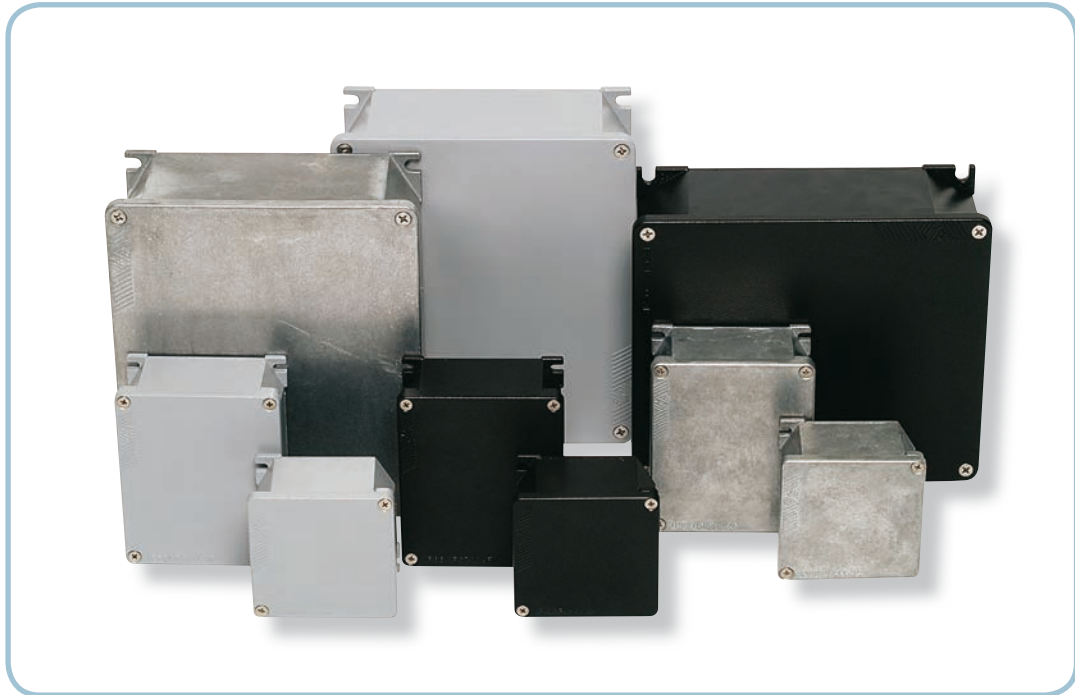

AC SERIES



AP-AC series

Main Features


The AP series of distribution boxes has now been **further expanded and improved**. A **new system of gaskets** ensures an even higher protection rating (IP66/IP67) whilst the **new galvanized steel captive cross-headed screws** ensure easier installation.

The range consists of 7 formats supplied in the RAL 7040 textured version (APV) in the unpainted version (APS) and in the **new APW version** suitable for **environments with extreme temperatures or salt environments (black)**.

The AC series of distribution boxes has now been **produced with metric threaded cable entries**.

To ensure the same protection degree, when assembling the boxes, the cable glands or other accessories used must also have an equivalent or higher protection degree.

The boxes are manufactured in compliance with the following standard: IEC 60670-1.

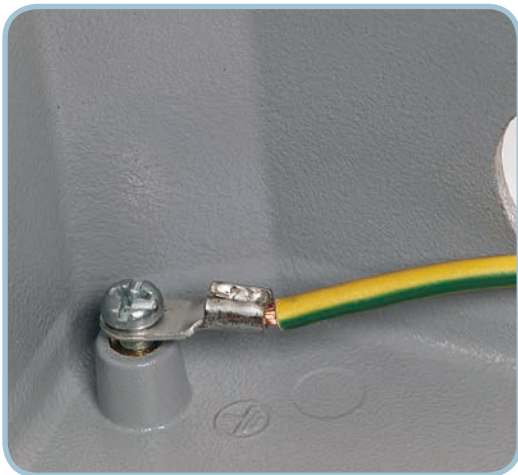

Both boxes and covers are supplied with provision for a terminal earthing connection to protect it from indirect contacts.



Accessory kits are available for fitting inside the boxes DIN rails or zinc-plated steel mounting plates.




The cover fixing screws become captive when the special o-rings are fitted.



A cover can be fitted to the box by using a special nylon string.

- boxes and covers in die-cast aluminium alloy
- galvanized steel screws for fixing cover
- pre-applied anti-ageing gaskets
- IP66/IP67 degree of protection (compliant with EN 60529)
- temperature range: from -40 °C to +110 °C
- oven painted with RAL 7040 grey epoxy-polyester powder
- accessories for boxes on page 7
- supplied complete with brass insert, screw, wire terminal and washer for 6 mm² earth terminals
- an earth terminal may be added to the cover (APR T kit)
- o-rings to make cover screws captive, included

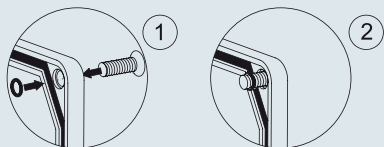

description

external dimensions 100 x 100 x 59

external dimensions 115 x 140 x 61

external dimensions 141 x 166 x 64


external dimensions 168 x 192 x 80

external dimensions 217 x 253 x 93


external dimensions 264 x 314 x 122

external dimensions 315 x 410 x 150

fixing centre line in mm, **APV 9**



fixing centre distance in mm, **APV 11/12/14/19/20/21**

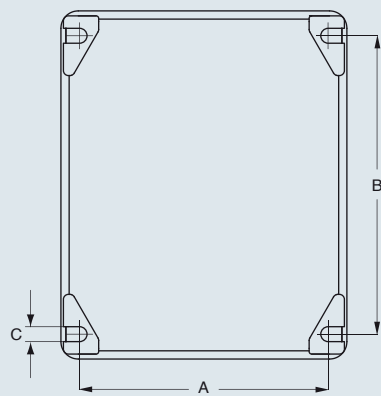

| part No. | A | B | C |
|---------------|-----|-----|-----|
| APV 9 | 90 | 80 | 6 |
| APV 11 | 105 | 120 | 6 |
| APV 12 | 125 | 144 | 6,5 |
| APV 14 | 149 | 168 | 6,5 |
| APV 19 | 196 | 226 | 9 |
| APV 20 | 236 | 275 | 9 |
| APV 21 | 283 | 367 | 9 |

the dimensions shown are not binding and may be changed without notice

APV painted distribution boxes





part No.

APV 9

dimensions in mm


APV 9

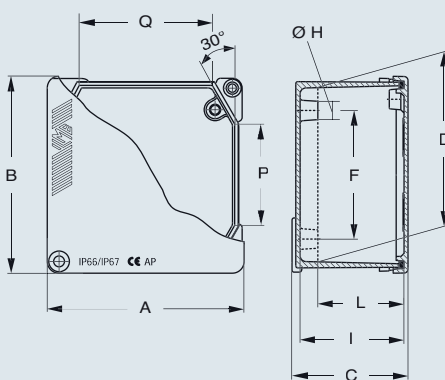

| part No. | A | B | C | D(*) | E(*) | F | G | ø H | I | L | M | N | P | Q |
|---------------|-----|-----|-----|------|------|-----|------|------|-----|-----|----|----|-----|-----|
| APV 9 | 100 | 100 | 59 | 88 | 88 | 66 | 70,5 | 10 | 53 | 44 | - | - | 48 | 65 |
| APV 11 | 115 | 140 | 61 | 128 | 103 | 107 | 66 | 10 | 55 | 46 | - | - | 90 | 81 |
| APV 12 | 141 | 166 | 64 | 153 | 128 | 121 | 99 | 12,5 | 58 | 49 | - | - | 104 | 100 |
| APV 14 | 168 | 192 | 80 | 176 | 152 | 153 | 113 | 10 | 74 | 65 | - | - | 128 | 125 |
| APV 19 | 217 | 253 | 93 | 236 | 201 | 188 | 153 | 12,5 | 85 | 75 | 38 | 21 | 169 | 162 |
| APV 20 | 264 | 314 | 122 | 292 | 243 | 238 | 198 | 12,5 | 114 | 104 | 49 | 24 | 203 | 192 |
| APV 21 | 315 | 410 | 150 | 386 | 291 | 333 | 248 | 12,5 | 141 | 126 | 61 | 31 | 295 | 240 |

(*) internal minimum dimensions measured on the post mounting plate risers plane

APV painted distribution boxes





part No.


APV 11
APV 12
APV 14
APV 19
APV 20
APV 21

dimensions in mm

APV 11/12/14/19/20/21

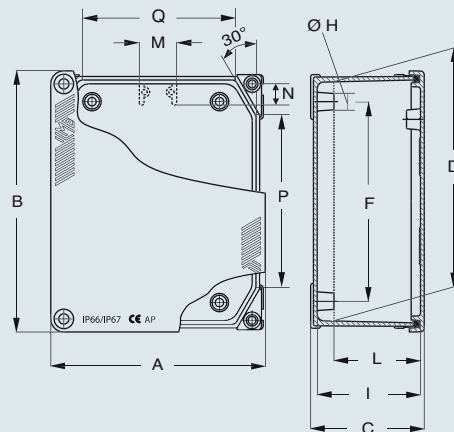


- boxes and covers in die-cast aluminium alloy
- galvanized steel screws for fixing cover
- anti-ageing gaskets not fitted to the box to ease the application of the desired paint
- IP66/IP67 degree of protection (compliant with EN 60529)
- temperature range: from -40 °C to +110 °C
- accessories for boxes on page 7
- supplied complete with brass insert, screw, wire terminal and washer for 6 mm² earth terminals
- an earth terminal may be added to the cover (APR T kit)
- o-rings to make cover screws captive, included

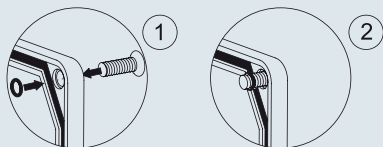


| description |
|-------------------------------------|
| external dimensions 100 x 100 x 59 |
| external dimensions 115 x 140 x 61 |
| external dimensions 141 x 166 x 64 |
| external dimensions 168 x 192 x 80 |
| external dimensions 217 x 253 x 93 |
| external dimensions 264 x 314 x 122 |
| external dimensions 315 x 410 x 150 |

fixing centre line in mm, **APS 9**



fixing centre distance in mm, **APS 11/12/14/19/20/21**

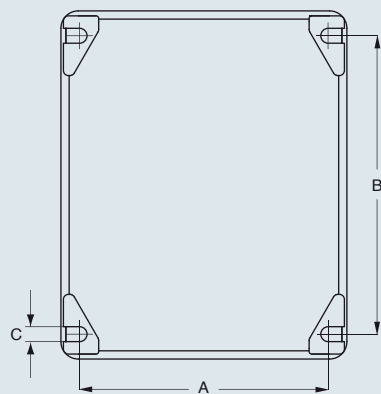

| part No. | A | B | C |
|---------------|-----|-----|-----|
| APS 9 | 90 | 80 | 6 |
| APS 11 | 105 | 120 | 6 |
| APS 12 | 125 | 144 | 6,5 |
| APS 14 | 149 | 168 | 6,5 |
| APS 19 | 196 | 226 | 9 |
| APS 20 | 236 | 275 | 9 |
| APS 21 | 283 | 367 | 9 |

the dimensions shown are not binding and may be changed without notice



APS unpainted distribution boxes



| part No. |
|--------------|
| APS 9 |

dimensions in mm

APS 9

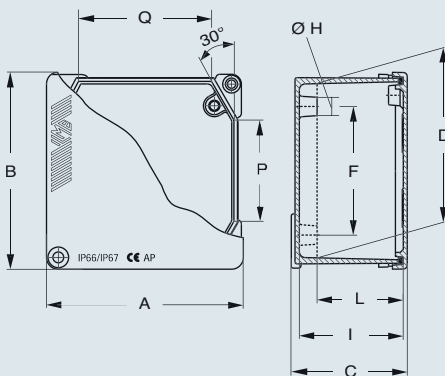



APS unpainted distribution boxes



| part No. |
|---------------|
| APS 11 |
| APS 12 |
| APS 14 |
| APS 19 |
| APS 20 |
| APS 21 |

dimensions in mm

APS 11/12/14/19/20/21

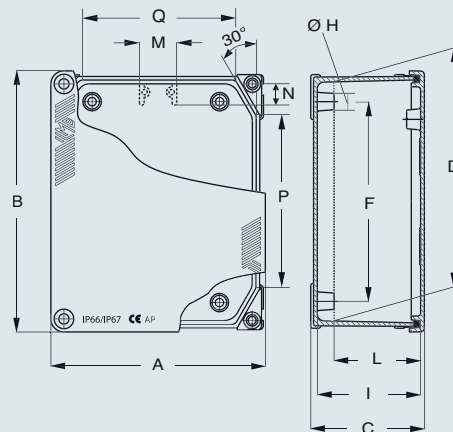

| part No. | A | B | C | D(*) | E(*) | F | G | ø H | I | L | M | N | P | Q |
|---------------|-----|-----|-----|------|------|-----|------|------|-----|-----|----|----|-----|-----|
| APS 9 | 100 | 100 | 59 | 88 | 88 | 66 | 70,5 | 10 | 53 | 44 | - | - | 48 | 65 |
| APS 11 | 115 | 140 | 61 | 128 | 103 | 107 | 66 | 10 | 55 | 46 | - | - | 90 | 81 |
| APS 12 | 141 | 166 | 64 | 153 | 128 | 121 | 99 | 12,5 | 58 | 49 | - | - | 104 | 100 |
| APS 14 | 168 | 192 | 80 | 176 | 152 | 153 | 113 | 10 | 74 | 65 | - | - | 128 | 125 |
| APS 19 | 217 | 253 | 93 | 236 | 201 | 188 | 153 | 12,5 | 85 | 75 | 38 | 21 | 169 | 162 |
| APS 20 | 264 | 314 | 122 | 292 | 243 | 238 | 198 | 12,5 | 114 | 104 | 49 | 24 | 203 | 192 |
| APS 21 | 315 | 410 | 150 | 386 | 291 | 333 | 248 | 12,5 | 141 | 126 | 61 | 31 | 295 | 240 |

(*) internal minimum dimensions measured on the post mounting plate risers plane


CAUTION

APS enclosures as unpainted, are not protected against corrosion. Pay particular attention when stocked in wet locations; it is recommended to promptly remove the plastic packaging envelope.

AP distribution boxes complete with cover



- boxes and covers in die-cast aluminium alloy
- galvanized steel screws for fixing cover
- pre-applied silicone rubber gaskets
- IP66/IP67 degree of protection (compliant with EN 60529)
- temperature range: -50 °C + +180 °C
- oven painted with RAL 9005 black epoxy-polyester powder
- surface chromate treatment
- accessories for boxes on page 7
- supplied complete with brass insert, screw, wire terminal and washer for 6 mm² earth terminals
- an earth terminal may be added to the cover (APR T kit)
- silicone rubber rings to make cover screws captive, included

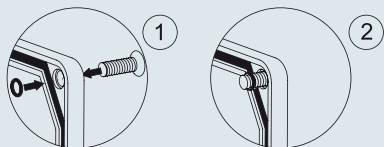

description

external dimensions 100 x 100 x 59

external dimensions 115 x 140 x 61

external dimensions 141 x 166 x 64


external dimensions 168 x 192 x 80

external dimensions 217 x 253 x 93


external dimensions 264 x 314 x 122

external dimensions 315 x 410 x 150

fixing centre line in mm, **APW 9**



fixing centre distance in mm, **APW 11/12/14/19/20/21**

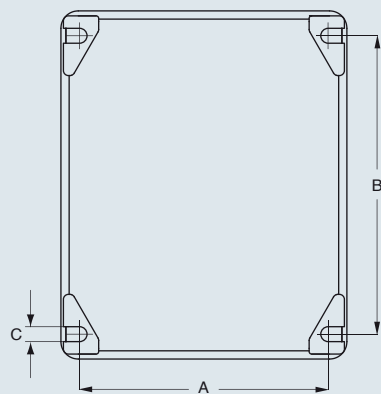

| part No. | A | B | C |
|---------------|-----|-----|-----|
| APW 9 | 90 | 80 | 6 |
| APW 11 | 105 | 120 | 6 |
| APW 12 | 125 | 144 | 6,5 |
| APW 14 | 149 | 168 | 6,5 |
| APW 19 | 196 | 226 | 9 |
| APW 20 | 236 | 275 | 9 |
| APW 21 | 283 | 367 | 9 |

the dimensions shown are not binding and may be changed without notice

APW distribution boxes for extreme environments





part No.

APW 9

dimensions in mm

APW 9

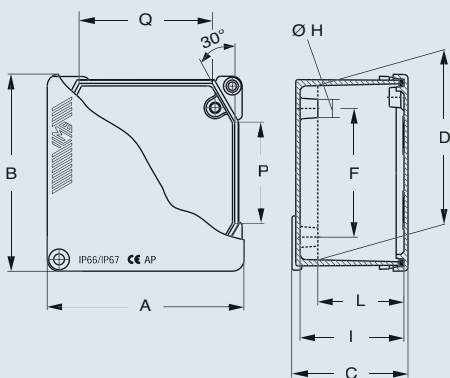

| part No. | A | B | C | D(*) | E(*) | F | G | ØH | I | L | M | N | P | Q |
|---------------|-----|-----|-----|------|------|-----|------|------|-----|-----|----|----|-----|-----|
| APW 9 | 100 | 100 | 59 | 88 | 88 | 66 | 70,5 | 10 | 53 | 44 | - | - | 48 | 65 |
| APW 11 | 115 | 140 | 61 | 128 | 103 | 107 | 66 | 10 | 55 | 46 | - | - | 90 | 81 |
| APW 12 | 141 | 166 | 64 | 153 | 128 | 121 | 99 | 12,5 | 58 | 49 | - | - | 104 | 100 |
| APW 14 | 168 | 192 | 80 | 176 | 152 | 153 | 113 | 10 | 74 | 65 | - | - | 128 | 125 |
| APW 19 | 217 | 253 | 93 | 236 | 201 | 188 | 153 | 12,5 | 85 | 75 | 38 | 21 | 169 | 162 |
| APW 20 | 264 | 314 | 122 | 292 | 243 | 238 | 198 | 12,5 | 114 | 104 | 49 | 24 | 203 | 192 |
| APW 21 | 315 | 410 | 150 | 386 | 291 | 333 | 248 | 12,5 | 141 | 126 | 61 | 31 | 295 | 240 |

(*) internal minimum dimensions measured on the post mounting plate risers plane

APW distribution boxes for extreme environments





part No.

APW 11
APW 12
APW 14
APW 19
APW 20
APW 21

dimensions in mm


APW 11/12/14/19/20/21

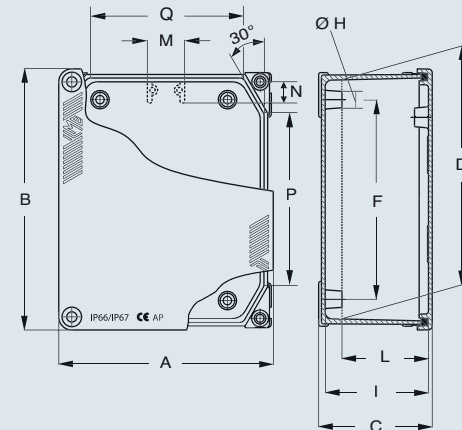

mounting plates in zinc-plated



sized DIN rail
M4x8 brass insert
additional earth terminal
cover to box fastening wire

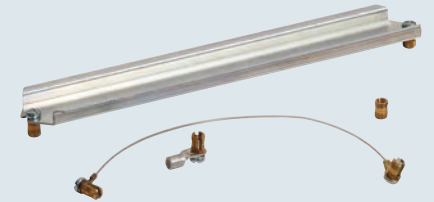

description

part No.

part No.

mounting plates complete with two earth terminals, inserts and fixing screws on the bottom of the box
 - for APV / APS / APW 11 boxes
 - for APV / APS / APW 12 boxes
 - for APV / APS / APW 14 boxes
 - for APV / APS / APW 19 boxes
 - for APV / APS / APW 20 boxes
 - for APV / APS / APW 21 boxes

APF 11
APF 12
APF 14
APF 19
APF 20
APF 21

sized DIN rail complete with fixing screws and inserts
 - for APV / APS / APW 9 boxes
 - for APV / APS / APW 11 boxes
 - for APV / APS / APW 12 boxes
 - for APV / APS / APW 14 boxes
 - for APV / APS / APW 19 boxes
 - for APV / APS / APW 20 boxes
 - for APV / APS / APW 21 boxes


APD 9
APD 11
APD 12
APD 14
APD 19
APD 20
APD 21

- M4x8 thread brass insert to ensure an easier fitting of equipment and PCBs to the bottom of the box
 - additional earth terminal kit consisting of a brass insert, M4 screw and washer, 6 mm² wire terminal for cover earthing connection
 - cover fastening wire enables the cover to be anchored to the box (temperature range: from -40 °C to +110 °C)

APR 04
APR T
APR F

dimensions in mm


APF

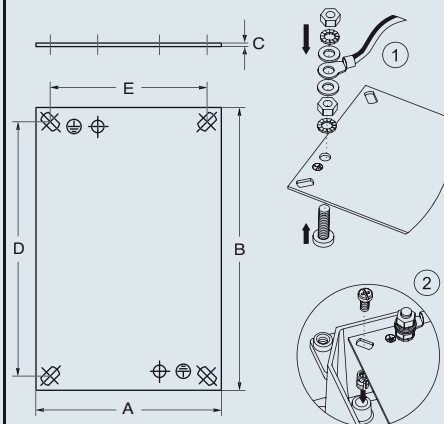



| part No. | A | B | C | D | E |
|---------------|-----|-----|-----|-----|-----|
| APF 11 | 78 | 119 | 1,5 | 107 | 66 |
| APF 12 | 111 | 133 | 1,5 | 121 | 99 |
| APF 14 | 125 | 165 | 1,5 | 153 | 113 |
| APF 19 | 165 | 200 | 1,5 | 188 | 153 |
| APF 20 | 210 | 250 | 1,5 | 238 | 198 |
| APF 21 | 260 | 345 | 1,5 | 333 | 248 |

dimensions in mm

APD



| part No. | A |
|---------------|-----|
| APD 9 | 74 |
| APD 11 | 103 |
| APD 12 | 134 |
| APD 14 | 168 |
| APD 19 | 220 |
| APD 20 | 287 |
| APD 21 | 393 |



the dimensions shown are not binding and may be changed without notice



- boxes and covers in die-cast aluminium alloy
- oven painted with RAL 7040 grey epoxy-polyester powder
- removable cover, fixed with zinc plated steel screws
- NBR special rubber gasket fixed to the cover
- IP65 degree of protection (compliant with EN 60529)
- temperature range: -20 °C + +80 °C

complete boxes with cable entry A2M




metric threaded entry

complete boxes without cable entry A2P




| description | part No. | cable entry | part No. |
|--|--------------------|-------------|--------------------|
| with pierced covers for unit Ø 22 mm | | | |
| external dimensions 92 x 92 x 86 - No. of holes for cover : 1 | A2M 0909.01 | M 25 | A2P 0909.01 |
| external dimensions 92 x 152 x 86 - No. of holes for cover : 2 | A2M 0915.02 | M 25 | A2P 0915.02 |
| external dimensions 92 x 205 x 86 - No. of holes for cover : 3 | A2M 0920.03 | M 25 | A2P 0920.03 |
| external dimensions 92 x 152 x 86 - No. of holes for cover : 4 | A2M 0915.04 | M 25 | A2P 0915.04 |
| external dimensions 92 x 257 x 86 - No. of holes for cover : 4 | A2M 0925.04 | M 25 | A2P 0925.04 |
| external dimensions 92 x 205 x 86 - No. of holes for cover : 6 | A2M 0920.06 | M 25 | A2P 0920.06 |

piercing unit Ø 22 mm




dimensions in mm


A2M / A2P 0909.01

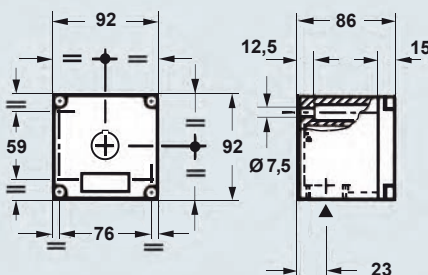


A2M / A2P 0915.02

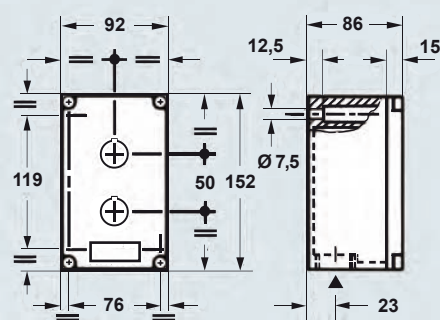


A2M / A2P 0920.03

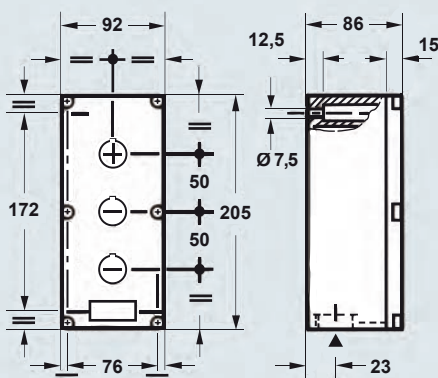


A2M / A2P 0915.04

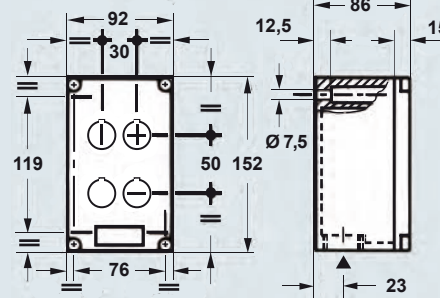

A2M / A2P 0925.04

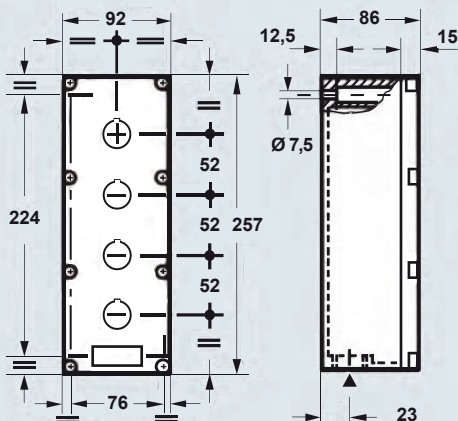

A2M / A2P 0920.06

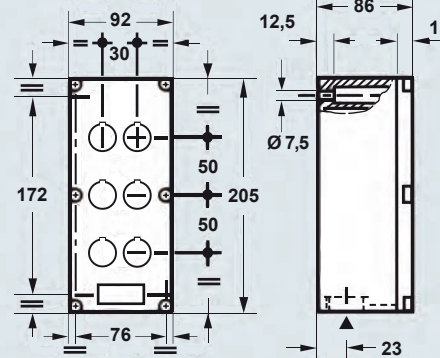

the dimensions shown are not binding and may be changed without notice

- boxes and covers in die-cast aluminium alloy
- oven painted with RAL 7040 grey epoxy-polyester powder
- removable cover, fixed with zinc plated steel screws
- NBR special rubber gasket fixed to the cover
- IP65 degree of protection (compliant with EN 60529)
- temperature range: -20 °C + +80 °C

complete boxes with cable entry A2M




complete boxes without cable entry A2P




| description | part No. | cable entry | part No. |
|---|--------------------|-------------|--------------------|
| external dimensions 152 x 152 x 86 - No. of holes for cover : 8 | A2M 1515.08 | M 25 | A2P 1515.08 |
| external dimensions 152 x 205 x 102 - No. of holes for cover : 12 | A2M 1520.12 | M 32 | A2P 1520.12 |
| external dimensions 230 x 205 x 102 - No. of holes for cover : 16 | A2M 2320.16 | M 32 | A2P 2320.16 |

piercing unit Ø 22 mm




dimensions in mm


A2M / A2P 1515.08

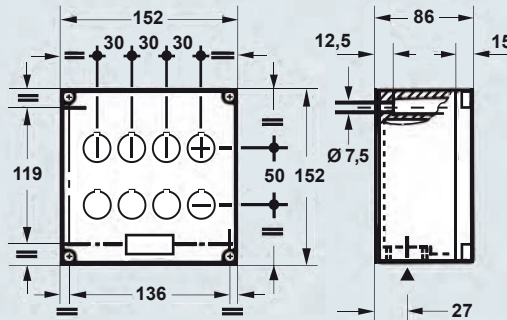

A2M / A2P 1520.12

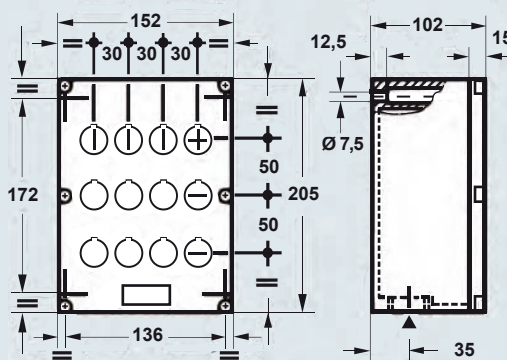

A2M / A2P 2320.16

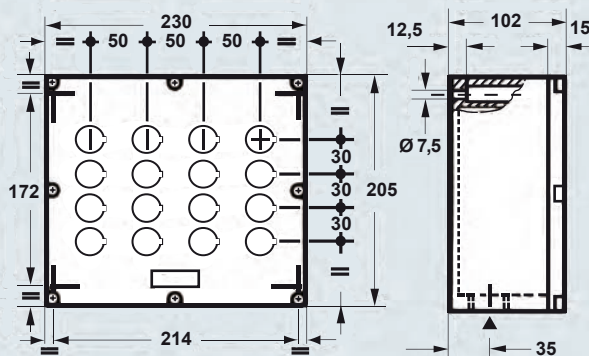

* on request this box can be supplied with cable entry on the short side (205 mm)

the dimensions shown are not binding and may be changed without notice

- boxes and covers in die-cast aluminium alloy
- oven painted with RAL 7040 grey epoxy-polyester powder
- removable cover, fixed with zinc plated steel screws
- NBR special rubber gasket fixed to the cover
- IP65 degree of protection (compliant with EN 60529)
- temperature range: -20 °C ÷ +80 °C

complete boxes with cable entry A3M



metric threaded entry


complete boxes without cable entry A3P




| description | part No. | cable entry | part No. |
|--|--------------------|-------------|--------------------|
| with pierced covers for unit Ø 30 mm | | | |
| external dimensions 92 x 92 x 86 - No. of holes for cover : 1 | A3M 0909.01 | M 25 | A3P 0909.01 |
| external dimensions 92 x 152 x 86 - No. of holes for cover : 2 | A3M 0915.02 | M 25 | A3P 0915.02 |
| external dimensions 92 x 205 x 86 - No. of holes for cover : 3 | A3M 0920.03 | M 25 | A3P 0920.03 |
| external dimensions 92 x 257 x 86 - No. of holes for cover : 4 | A3M 0925.04 | M 25 | A3P 0925.04 |

piercing unit Ø 30 mm


dimensions in mm




A3M / A3P 0909.01

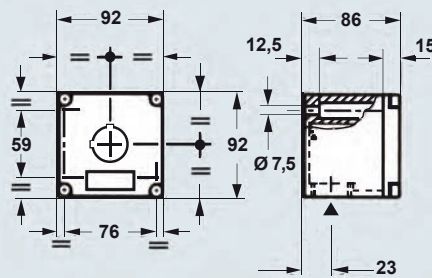


A3M / A3P 0915.02

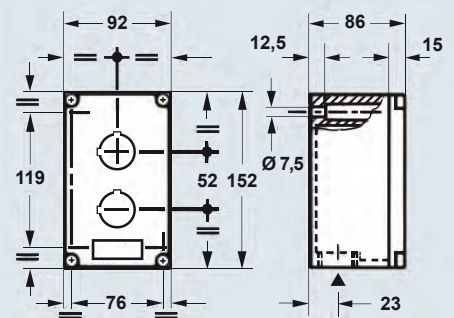

A3M / A3P 0920.03

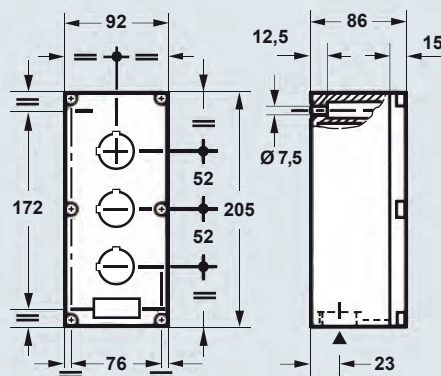

A3M / A3P 0925.04

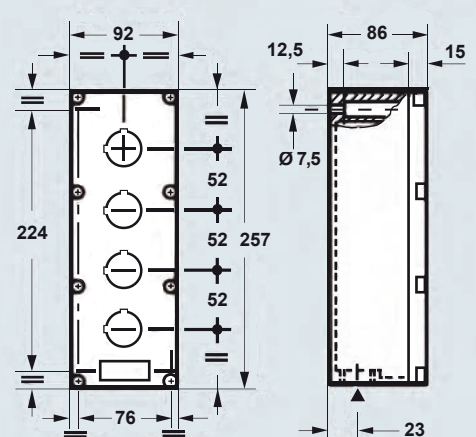

the dimensions shown are not binding and may be changed without notice

- boxes and covers in die-cast aluminium alloy
- oven painted with RAL 7040 grey epoxy-polyester powder
- removable cover, fixed with zinc plated steel screws
- NBR special rubber gasket fixed to the cover
- IP65 degree of protection (compliant with EN 60529)
- temperature range: -20 °C + +80 °C

complete boxes with cable entry A3M




metric threaded entry

complete boxes without cable entry A3P




| description | part No. | cable entry | part No. |
|--|--------------------|-------------|--------------------|
| with pierced covers for unit Ø 30 mm | | | |
| external dimensions 152 x 152 x 86 - No. of holes for cover : 4 | A3M 1515.04 | M 25 | A3P 1515.04 |
| external dimensions 152 x 205 x 102 - No. of holes for cover : 6 | A3M 1520.06 | M 32 | A3P 1520.06 |
| external dimensions 230 x 205 x 102 - No. of holes for cover : 9 | A3M 2320.09 | M 32 | A3P 2320.09 |

piercing unit Ø 30 mm




dimensions in mm


A3M / A3P 1515.04

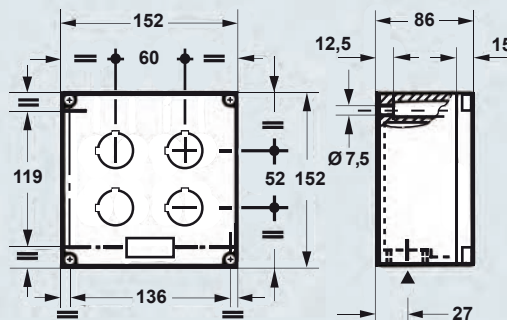

A3M / A3P 1520.06

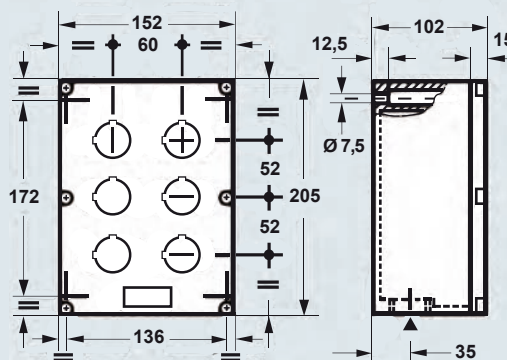

A3M / A3P 2320.09

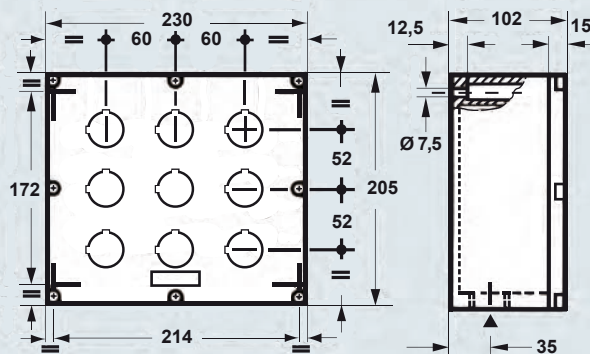

the dimensions shown are not binding and may be changed without notice

- boxes and covers in die-cast aluminium alloy
- oven painted with RAL 7040 grey epoxy-polyester powder
- removable cover, fixed with zinc plated steel screws
- NBR special rubber gasket fixed to the cover
- IP65 degree of protection (compliant with EN 60529)
- temperature range: -20 °C + +80 °C

complete boxes with cable entry AM



metric threaded entry


complete boxes without cable entry AP




| description | part No. | cable entry | part No. |
|-----------------------------------|----------------|-------------|----------------|
| covers without holes | | | |
| external dimensions 92 x 92 x 86 | AM 0909 | M 25 | AP 0909 |
| external dimensions 92 x 152 x 86 | AM 0915 | M 25 | AP 0915 |
| external dimensions 92 x 205 x 86 | AM 0920 | M 25 | AP 0920 |
| external dimensions 92 x 257 x 86 | AM 0925 | M 25 | AP 0925 |

dimensions in mm


AM / AP 0909

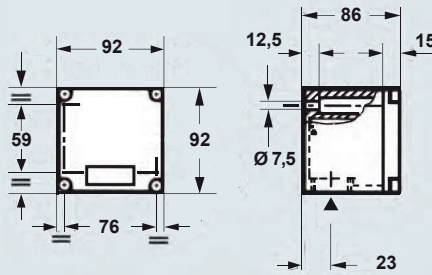


AM / AP 0915

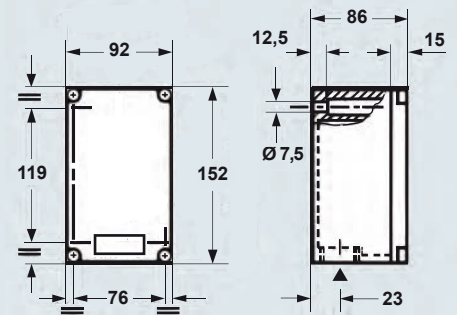

AM / AP 0920

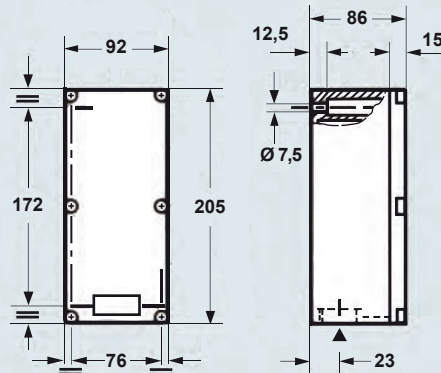

AM / AP 0925

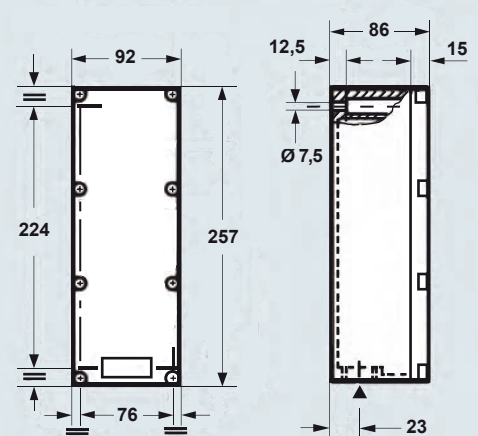

the dimensions shown are not binding and may be changed without notice

- boxes and covers in die-cast aluminium alloy
- oven painted with RAL 7040 grey epoxy-polyester powder
- removable cover, fixed with zinc plated steel screws
- NBR special rubber gasket fixed to the cover
- IP65 degree of protection (compliant with EN 60529)
- temperature range: -20 °C + +80 °C

complete boxes with cable entry AM




complete boxes without cable entry AP




| description | part No. | cable entry | part No. |
|-------------------------------------|----------------|-------------|----------------|
| covers without holes | | | |
| external dimensions 152 x 152 x 86 | AM 1515 | M 25 | AP 1515 |
| external dimensions 152 x 205 x 102 | AM 1520 | M 32 | AP 1520 |
| external dimensions 230 x 205 x 102 | AM 2320 | M 32 | AP 2320 |

dimensions in mm


AM / AP 1515

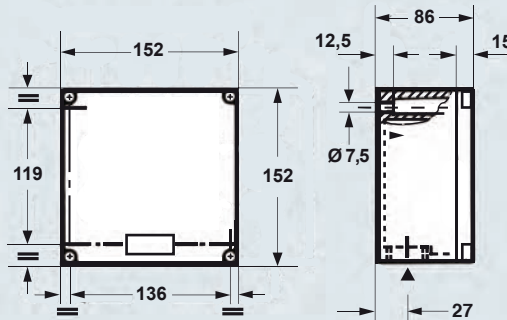

AM / AP 1520

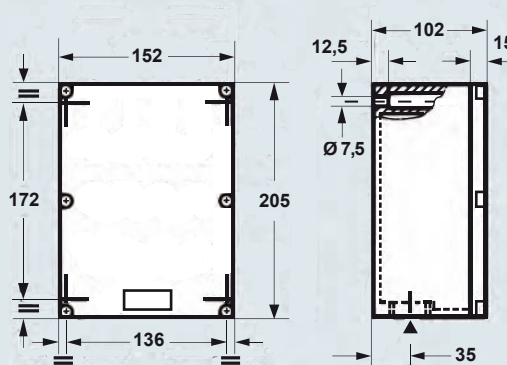

AM / AP 2320

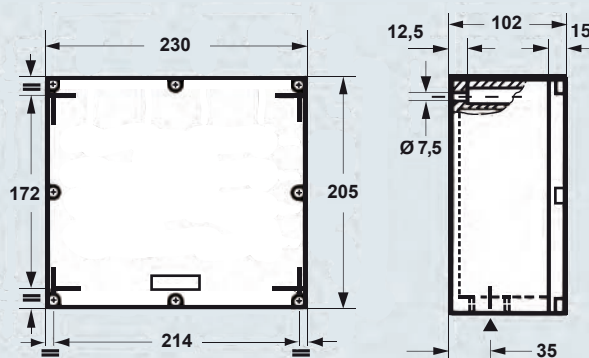

the dimensions shown are not binding and may be changed without notice

- boxes and covers in die-cast aluminium alloy
- oven painted with RAL 7040 grey epoxy-polyester powder
- equipped with zinc-plated steel screws
- NBR special rubber gasket fixed to the cover

covers A2T and A3T



covers AC



| description | part No. | No. of holes | part No. |
|------------------------------------|--------------------|--------------|----------------|
| pierced for unit Ø 22 mm | | | |
| external dimensions 92 x 92 x 15 | A2T 0909.01 | 1 | |
| external dimensions 92 x 152 x 15 | A2T 0915.02 | 2 | |
| external dimensions 92 x 205 x 15 | A2T 0920.03 | 3 | |
| external dimensions 92 x 152 x 15 | A2T 0915.04 | 4 | |
| external dimensions 92 x 257 x 15 | A2T 0925.04 | 4 | |
| external dimensions 92 x 205 x 15 | A2T 0920.06 | 6 | |
| external dimensions 152 x 152 x 15 | A2T 1515.08 | 8 | |
| external dimensions 152 x 205 x 15 | A2T 1520.12 | 12 | |
| external dimensions 230 x 205 x 15 | A2T 2320.16 | 16 | |
| pierced for unit Ø 30 mm | | | |
| external dimensions 92 x 92 x 15 | A3T 0909.01 | 1 | |
| external dimensions 92 x 152 x 15 | A3T 0915.02 | 2 | |
| external dimensions 92 x 205 x 15 | A3T 0920.03 | 3 | |
| external dimensions 92 x 257 x 15 | A3T 0925.04 | 4 | |
| external dimensions 152 x 152 x 15 | A3T 1515.04 | 4 | |
| external dimensions 152 x 205 x 15 | A3T 1520.06 | 6 | |
| external dimensions 230 x 205 x 15 | A3T 2320.09 | 9 | |
| without holes | | | |
| external dimensions 92 x 92 x 15 | | | AC 0909 |
| external dimensions 92 x 152 x 15 | | | AC 0915 |
| external dimensions 92 x 205 x 15 | | | AC 0920 |
| external dimensions 92 x 257 x 15 | | | AC 0925 |
| external dimensions 152 x 152 x 15 | | | AC 1515 |
| external dimensions 152 x 205 x 15 | | | AC 1520 |
| external dimensions 230 x 205 x 15 | | | AC 2320 |

Take your notes here

Lined area for taking notes, consisting of multiple horizontal lines.

APX Distribution boxes

APV ATEX



For further information please contact **ILME S.p.A.**



WORLDWIDE SALES ORGANIZATION

Headquarters

ILME S.p.A.

Via M.A. Colonna, 9
20149 Milano, Italia
T +39 0234560522
info@ilme.com

France

ILME FRANCE S.A.R.L.

431 rue Roland Garros
Parc d'Activités de l'Aéroport
42160 Andrézieux-Bouthéon
T +33 04 7736 2336
ilme-france@ilme.fr

Sweden

and Nordic Countries

ILME NORDIC AB

Transportvägen 18
246 42 Löddeköpinge
T +46 4618 2800
info@ilme.se

China

ILME CHINA CO. LTD.

Room 101, Building 3
188 Xinjunhuan Road, Minhang
Shanghai 201114
T +86 21 6248 9961
info@ilmechina.com

South Korea

ILME KOREA CO.

714, DaeRyung Technotown 20th
5 Gasan Digital 1-Ro, GeumCheon-Gu
Seoul 08594
T +82-2-2225-8432
sales@ilme.kr

Germany

ILME GmbH

Max-Planck-Straße 12
51674 Wiehl
T +49 (0)2261 7955 0
technik@ilme.de

United Kingdom

ILME UK LIMITED

50 Evans Road, Venture Point
Speke, Liverpool L24 9PB
T +44 0151 336 9321
sales@ilmeuk.co.uk

Japan

ILME JAPAN CO. LTD.

K.I.B.C. Bldg 5-2
Minatojima Minamimachi 5-Chome
Chuo-Ku, Kobe 650-0047
T +81 78 302 2005
info@ilmejapan.co.jp

www.ilme.com

www.ilme.com

XDG APAC 1219



catalogues