


Part number

CIF Q07 2.4

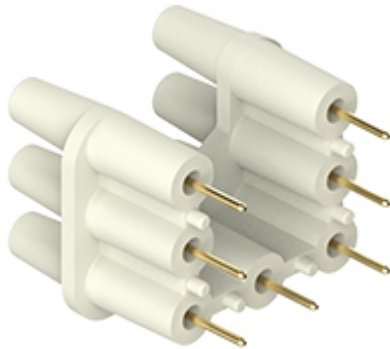

Interface for printed circuit, 7 poles, 7,5 A 250 V 4 kV 3, for up to 2,4 mm thick PCB



Product description		Material properties	
Product type	Interface for printed circuit	Main material	Polycarbonate (PC)
N. of poles	7 poles	Other materials	Contacts: copper alloy
Specification	For CQ 07 inserts For up to 2,4 mm thick PCB	Colour	RAL 7032 grey
Technical data		RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
Voltage	250 V	China RoHs - EFUP	50
Rated impulse withstand voltage	4 kV	REACH SVHC substances	Yes Lead
Pollution degree	3	SCIP number	022a8a72-7a4c-443a-a1ad-2461ccc7884c
Contact type	Turned gold plated	Approvals / Standards	
Further technical details		Certifications	DNV
Characteristics according to EN 61984	7,5 A 250 V 4 kV 3	UL	ECBT2
Weight	2,50 g	cUL	ECBT8
Operating temperature range (min, max)	-40°C...+125°C	General ordering information	
		EAN13 code	8015747270366
		eCl@ss 8.1	27449290
		ETIM 7.0	EC002943
		Packaging Information	
		Packaging length	112,00 mm
		Packaging height	95,00 mm
		Packaging width	117,00 mm
		Packaging weight	0,33 kg
		Packaging volume	1,24 dm ³
		Packaging description	Carton box
		Packaging quantity	64 Pcs
		Packaging EAN code	8015747271455
		Sub-packaging length	50,00 mm
		Sub-packaging height	44,00 mm
		Sub-packaging width	50,00 mm
		Sub-packaging weight	0,04 kg
		Sub-packaging volume	0,11 dm ³
		Sub-packaging description	Carton tray
		Sub-packaging quantity	8 Pcs
		Sub-packaging EAN barcode	8015747271462

Part number

CIF Q07 2.4



Catalogue drawings

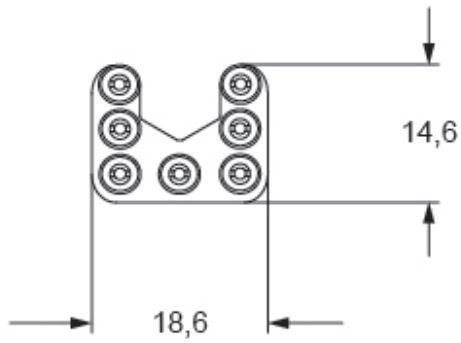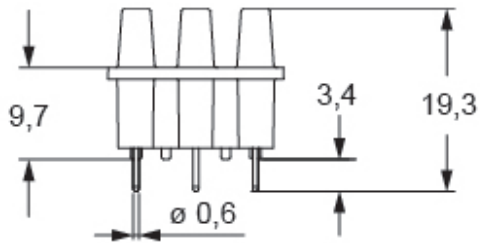

PCB-Layout

