

Part number

CR 72 D



Coding pin, for standard inserts, in zinc plated iron



Product description

| | |
|----------------------|---|
| Product type | Coding pin |
| Specification | For standard inserts In zinc plated iron |

Further technical details

| | |
|---------------|--------|
| Weight | 2,00 g |
|---------------|--------|

Material properties

| | |
|------------------------------|---|
| RoHS conformity | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| China RoHS - EFUP | 50 |
| REACH SVHC substances | Yes Lead |
| SCIP number | Ae969a40-ab13-45f5-8362-242b71239313 |

General ordering information

| | |
|-------------------|---------------|
| EAN13 code | 8015747188470 |
| eCl@ss 8.1 | 27440203 |
| ETIM 7.0 | EC002311 |


Packaging Information

| | |
|----------------------------------|----------------------|
| Sub-packaging length | 50,00 mm |
| Sub-packaging height | 44,00 mm |
| Sub-packaging width | 50,00 mm |
| Sub-packaging weight | 0,10 kg |
| Sub-packaging volume | 0,11 dm ³ |
| Sub-packaging description | Plastic box |
| Sub-packaging quantity | 50 Pcs |
| Sub-packaging EAN barcode | 8015747188517 |

Part number CR 72 D




Catalogue drawings

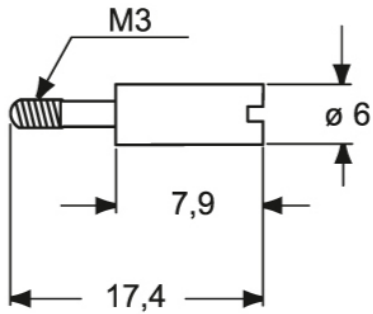

Catalogue drawings

Coding options using the three coding and guiding pins

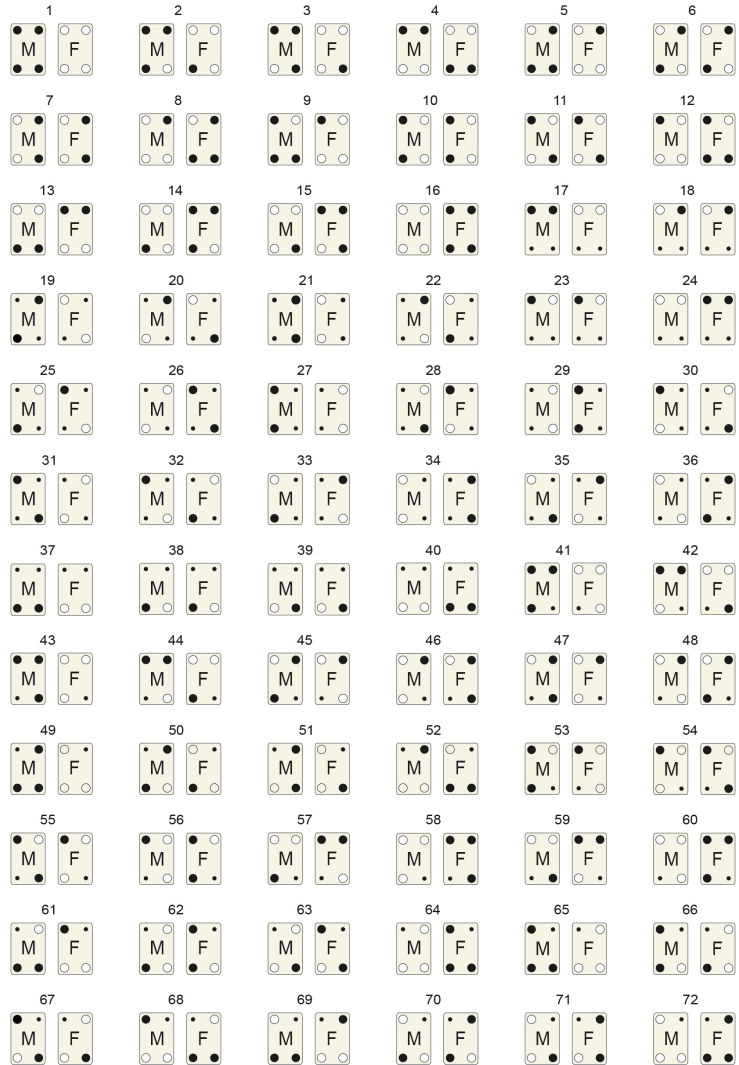

- female coding and guiding pin (CRF/CRF D and CRF CX/CRF CX D)
 - male coding and guiding pin (CRM/CRM D and CRM CX/CRM CX D)
 - single coding pin (CR 72/CR 72 D and CR 72 CX/CR 72 CX D)
- M = male insert
F = female insert