

Part number

# CXFA 4.0



Female crimp contact, CX series, 40 A, turned silver plated, wire cross section 4 mm<sup>2</sup>, AWG 12


Product description		Material properties	
<b>Product type</b>	Crimp contact	<b>Main material</b>	Copper alloy
<b>Series</b>	CX		Compliant with exemption
<b>Gender</b>	Female	<b>RoHs conformity</b>	6(c): copper alloy containing up to 4% lead by weight
Technical data		<b>China RoHs - EFUP</b>	50
<b>Current</b>	40 A	<b>REACH SVHC substances</b>	Yes
<b>Wire cross-section</b>	4,00 mm <sup>2</sup>		Lead
<b>AWG size</b>	12	<b>SCIP number</b>	C0979fba-9907-458f-a94a-db781440f273
<b>Contact type</b>	Turned silver plated	Approvals / Standards	
Further technical details		<b>Certifications</b>	CSA, EAC
<b>Weight</b>	2,60 g	<b>UL</b>	ECBT2
<b>Conductors stripping length</b>	9,6 mm	<b>cUL</b>	ECBT8
		General ordering information	
		<b>EAN13 code</b>	8015747042499
		<b>eCl@ss 8.1</b>	27440204
		<b>ETIM 7.0</b>	EC000796
		Packaging Information	
		<b>Packaging length</b>	112,00 mm
		<b>Packaging height</b>	95,00 mm
		<b>Packaging width</b>	117,00 mm
		<b>Packaging weight</b>	1,23 kg
		<b>Packaging volume</b>	1,24 dm <sup>3</sup>
		<b>Packaging description</b>	Carton box
		<b>Packaging quantity</b>	400 Pcs
		<b>Packaging EAN code</b>	8015747207058
		<b>Sub-packaging length</b>	50,00 mm
		<b>Sub-packaging height</b>	44,00 mm
		<b>Sub-packaging width</b>	50,00 mm
		<b>Sub-packaging weight</b>	0,15 kg
		<b>Sub-packaging volume</b>	0,11 dm <sup>3</sup>
		<b>Sub-packaging description</b>	Plastic box
		<b>Sub-packaging quantity</b>	50 Pcs
		<b>Sub-packaging EAN barcode</b>	8015747042505

Part number

# CXFA 4.0



## Catalogue drawings

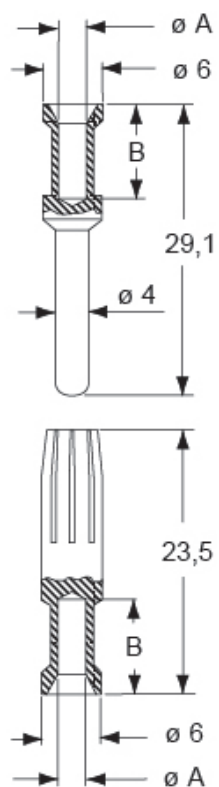

### CXF and CXM contacts

conductor cross-sectional area (mm <sup>2</sup> )	conductor slot $\varnothing A$ (mm)	conductor stripping length $B$ (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6
10	4,3	15