


Part number

# PE 1664 PV



Mobile socket outlet, PLUSO series, 3 poles + PE, 6 h (red), 16 A, 380 ÷ 415 V

| Product description                           |   | Material properties          |   |
|---|---|------------------------------|---|
| <b>Product type</b>                           | Socket<br>Mobile  | <b>Colour</b>                | RAL 7035 grey, RAL 3000 red   |
| <b>Series</b>                                 | PE...PV, PLUSO  | <b>RoHs conformity</b>       | Compliant with exemption<br>6(c): copper alloy containing up to 4% lead by weight |
| <b>Connection type</b>                        | Screw terminal connection   | <b>China RoHs - EFUP</b>     | 50  |
| <b>N. of poles</b>                            | 3 poles +  | <b>REACH SVHC substances</b> | Yes<br>Lead   |
| <b>Clock position</b>                         | 6   | <b>SCIP number</b>           | Ca7de37f-add8-4b77-9861-279c94903ade  |
| Technical data                                |   | Approvals / Standards        |   |
| <b>Current</b>                                | 16 A  | <b>Reference standard</b>    | EN 60309-1 and -2   |
| <b>Voltage</b>                                | 380 ÷ 415 V   | General ordering information |   |
| <b>IP degree of protection</b>                | IP44  | <b>EAN13 code</b>            | 8015747064651   |
| Further technical details                     |   | Packaging Information        |   |
| <b>Weight</b>                                 | 150,00 g  | <b>Packaging length</b>      | 400,00 mm   |
| <b>Operating temperature range (min, max)</b> | -25°C ... +40°C   | <b>Packaging height</b>      | 310,00 mm   |
|   |   | <b>Packaging width</b>       | 670,00 mm   |
|   |   | <b>Packaging weight</b>      | 16,70 kg  |
|   |   | <b>Packaging volume</b>      | 83,08 dm <sup>3</sup>   |
|   |   | <b>Packaging description</b> | Carton box  |
|   |   | <b>Packaging quantity</b>    | 100 Pcs   |
|   |   | <b>Packaging EAN code</b>    | 8015747064668   |


Part number

# PE 1664 PV



Catalogue drawings

(16 / 32A) PE ... PV

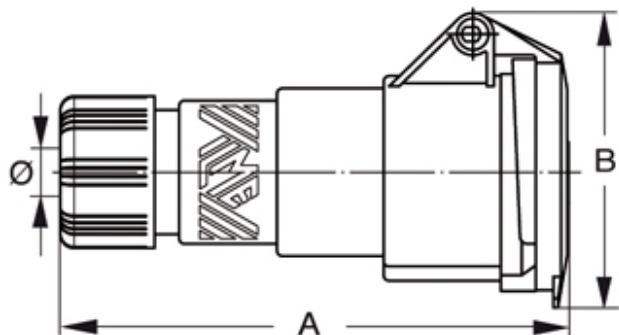

| PE...PV         | A   | B    | ø min | ø max |
|-----------------|-----|------|-------|-------|
| <b>16A</b> 2P+⊕ | 146 | 74,5 | 7     | 16    |
| 3P+⊕            | 146 | 84,5 | 7     | 16    |
| 3P+N+⊕          | 146 | 92,5 | 8     | 24    |
| <b>32A</b> 2P+⊕ | 163 | 102  | 8     | 24    |
| 3P+⊕            | 163 | 102  | 8     | 24    |
| 3P+N+⊕          | 163 | 105  | 8     | 24    |