


Part number

# PE 1674 PIF



Flush-mounting socket outlet, PLUSO series, 3 poles + PE, 7 h (black), 16 A, 480 ÷ 500 V, inclined, with bigger flange

#### Product description

|                       |   |
|-----------------------|---|
| <b>Product type</b>   | Socket<br>Flush-mounting  |
| <b>Series</b>         | PE...PIF, PLUSO   |
| <b>N. of poles</b>    | 3 poles +  |
| <b>Clock position</b> | 7   |
| <b>Specification</b>  | Inclined, bigger flange   |

#### Technical data

|                                |             |
|--------------------------------|-------------|
| <b>Current</b>                 | 16 A        |
| <b>Voltage</b>                 | 480 ÷ 500 V |
| <b>IP degree of protection</b> | IP44        |

#### Further technical details

|   |                 |
|---|-----------------|
| <b>Weight</b>                                 | 158,00 g        |
| <b>Operating temperature range (min, max)</b> | -25°C ... +40°C |

#### Material properties

|               |                               |
|---------------|-------------------------------|
| <b>Colour</b> | RAL 7035 grey, RAL 9005 black |
|---------------|-------------------------------|

#### Approvals / Standards

|                           |                   |
|---------------------------|-------------------|
| <b>Reference standard</b> | EN 60309-1 and -2 |
|---------------------------|-------------------|

#### General ordering information

|                   |               |
|-------------------|---------------|
| <b>EAN13 code</b> | 8015747064958 |
|-------------------|---------------|

#### Packaging Information


|                              |               |
|------------------------------|---------------|
| <b>Packaging description</b> | Carton box    |
| <b>Packaging quantity</b>    | 10 Pcs        |
| <b>Packaging EAN code</b>    | 8015747110082 |

Part number

# PE 1674 PIF



Catalogue drawings

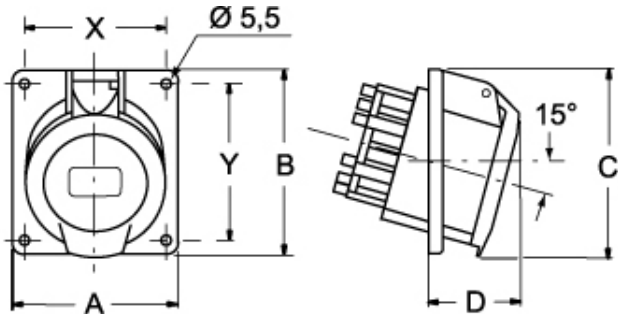

|            |             |        | A  | B   | C  | D  | X  | Y  |
|------------|-------------|--------|----|-----|----|----|----|----|
| <b>PIF</b> | <b>16 A</b> | 2P+⊕   | 92 | 100 | -- | 52 | 77 | 85 |
|            |             | 3P+⊕   | 92 | 100 | -- | 53 | 77 | 85 |
| <b>PI</b>  | <b>16 A</b> | 2P+⊕   | 64 | 82  | -- | 38 | 52 | 60 |
|            |             | 3P+⊕   | 64 | 82  | -- | 42 | 52 | 60 |
|            |             | 3P+N+⊕ | 92 | 100 | -- | 43 | 77 | 60 |
| <b>PI</b>  | <b>32 A</b> | 2P+⊕   | 92 | 100 | -- | 40 | 77 | 85 |
|            |             | 3P+⊕   | 92 | 100 | -- | 40 | 77 | 85 |
|            |             | 3P+N+⊕ | 92 | 102 | -- | 43 | 77 | 85 |