


Part number

PK 1665 PB5



Interlocked switched socket-outlet, PK series, 3 poles + N + PE, 6 h (red), 16 A, 200/346 ÷ 240/415 V, E16 fuse carrier

Product description

Product type	Interlocked switched socket-outlet
Series	PK..PB5
N. of poles	3 poles + N + 
Clock position	6
Specification	E16 fuse carrier

Technical data

Current	16 A
Voltage	200/346 ÷ 240/415 V
IP degree of protection	IP55

Further technical details

Weight	1.600,00 g
Operating temperature range (min, max)	-25°C ... +40°C
IK rating (impact degree of protection)	IK10

Material properties

Colour	RAL 7035 grey, RAL 3000 red
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ce861c8d-b979-403b-96d9-80aef6dc281d

Approvals / Standards

Reference standard	EN 60309-1, -2 e -4
---------------------------	---------------------

General ordering information

EAN13 code	8015747080422
-------------------	---------------

Packaging Information



Packaging length	400,00 mm
Packaging height	310,00 mm
Packaging width	670,00 mm
Packaging weight	30,00 kg
Packaging volume	83,08 dm ³
Packaging description	Carton box
Packaging quantity	15 Pcs
Packaging EAN code	8015747080439
Sub-packaging length	285,00 mm
Sub-packaging height	130,00 mm
Sub-packaging width	130,00 mm
Sub-packaging weight	2,00 kg
Sub-packaging volume	4,82 dm ³
Sub-packaging description	Carton box
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747080446

Part number

PK 1665 PB5



Catalogue drawings

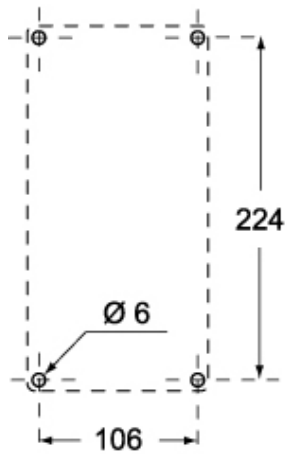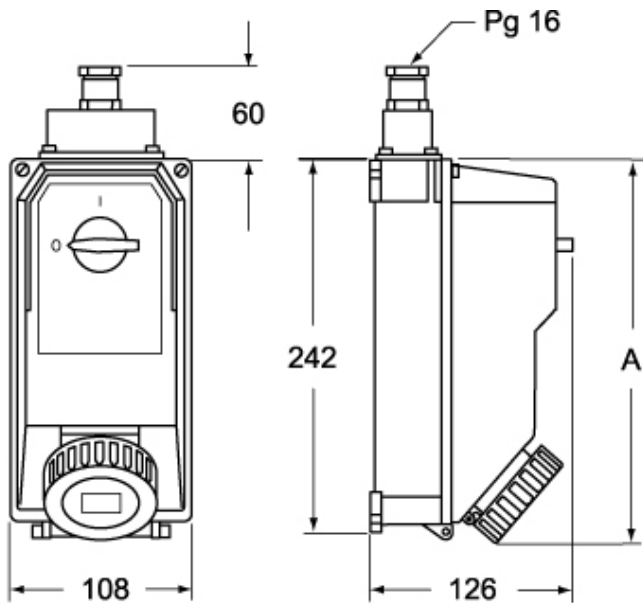

	A
2P+⊕	260
3P+⊕	260
3P+N+⊕	270