

Part number

PK 3243 PB5



Interlocked switched socket-outlet, PK series,
2 poles + PE, 4 h (yellow), 32 A, 100 ÷ 130 V,
E33 - DIII fuse carrier

Product description

| | |
|-----------------------|------------------------------------|
| Product type | Interlocked switched socket-outlet |
| Series | PK..PB5 |
| N. of poles | 2 poles + |
| Clock position | 4 |
| Specification | E33 - DIII fuse carrier |

Technical data

| | |
|--------------------------------|-------------|
| Current | 32 A |
| Voltage | 100 ÷ 130 V |
| IP degree of protection | IP55 |

Further technical details

| | |
|--|-----------------|
| Weight | 3.000,00 g |
| Operating temperature range (min, max) | -25°C ... +40°C |
| IK rating (impact degree of protection) | IK10 |

Material properties

| | |
|------------------------------|--|
| Colour | RAL 7035 grey, RAL 1021 yellow |
| RoHs conformity | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| China RoHs - EFUP | 50 |
| REACH SVHC substances | Yes Lead |
| SCIP number | F6799547-ab84-42f2-938f-233ba663766d |

Approvals / Standards

| | |
|---------------------------|---------------------|
| Reference standard | EN 60309-1, -2 e -4 |
|---------------------------|---------------------|

General ordering information

| | |
|-------------------|---------------|
| EAN13 code | 8015747081153 |
|-------------------|---------------|

Packaging Information


| | |
|------------------------------|-----------------------|
| Packaging length | 400,00 mm |
| Packaging height | 165,00 mm |
| Packaging width | 170,00 mm |
| Packaging weight | 3,00 kg |
| Packaging volume | 11,22 dm ³ |
| Packaging description | Carton box |
| Packaging quantity | 1 Pcs |
| Packaging EAN code | 8015747081160 |

Part number

PK 3243 PB5



Catalogue drawings

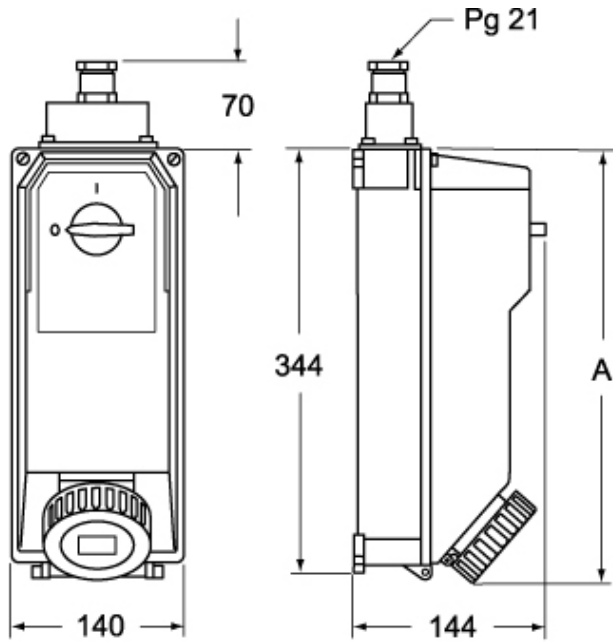

| | A |
|---------------|----------|
| 2P+⊕ | 363 |
| 3P+⊕ | 370 |
| 3P+N+⊕ | 370 |