

Part number

# SQV 3235.5



Interlocked switched socket-outlet, SQV series, 3 poles + N + PE, 3 h (red), 32 A, 220/380 V, sectionable fuse carrier 10 x 38 mm

| Product description                     |                                                                                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------------------|
| Product type                            | Interlocked switched socket-outlet                                                              |
| Series                                  | SQV                                                                                             |
| N. of poles                             | 3 poles + N +  |
| Clock position                          | 3                                                                                               |
| Specification                           | Sectionable fuse carrier 10 x 38 mm                                                             |
| Technical data                          |                                                                                                 |
| Current                                 | 32 A                                                                                            |
| Voltage                                 | 220/380V (50Hz) 250/440V (60Hz)                                                                 |
| IP degree of protection                 | IP55                                                                                            |
| Further technical details               |                                                                                                 |
| Operating temperature range (min, max)  | -25°C ... +40°C                                                                                 |
| IK rating (impact degree of protection) | IK08                                                                                            |


| Material properties          |                             |
|------------------------------|-----------------------------|
| Colour                       | RAL 7035 grey, RAL 3000 red |
| Approvals / Standards        |                             |
| Reference standard           | EN 60309-1, -2 e -4         |
| General ordering information |                             |
| EAN13 code                   | 8015747160452               |

Part number


SQV 3235.5



Catalogue drawings

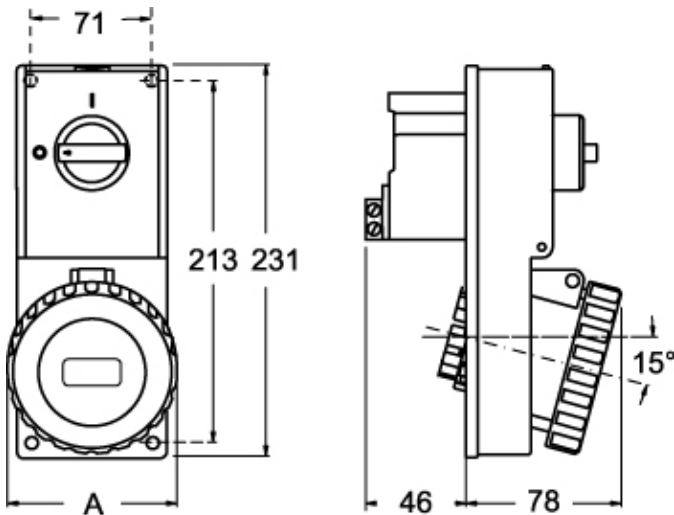

Catalogue drawings

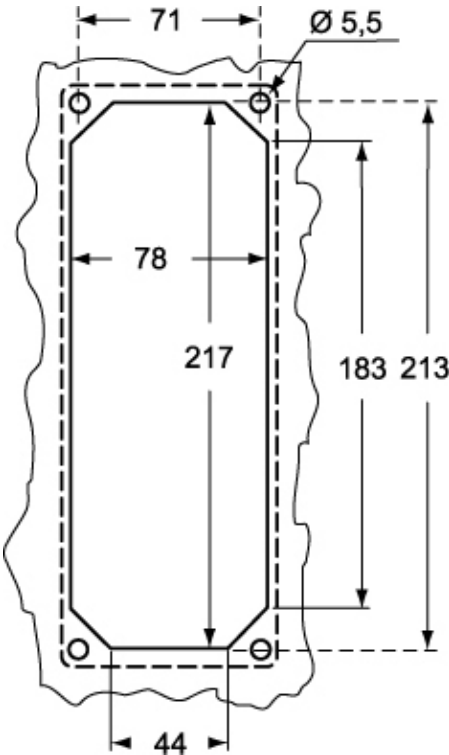

| SQV.5 |        | A   |
|-------|--------|-----|
| 32A   | 2P+⊕   | 92  |
|       | 3P+⊕   | 92  |
|       | 3P+N+⊕ | 100 |