


Part number

# SQV 3293.5



Interlocked switched socket-outlet, SQV series, 2 poles + PE, 9 h (red), 32 A, 380 ÷ 415 V, sectionable fuse carrier 10 x 38 mm

| Product description                            |   | Material properties              |  |
|--|---|----------------------------------|--|
| <b>Product type</b>                            | Interlocked switched socket-outlet  | <b>Colour</b>                    | RAL 7035 grey, RAL 3000 red  |
| <b>Series</b>                                  | SQV   |                                  | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| <b>N. of poles</b>                             | 2 poles +  | <b>RoHs conformity</b>           | 6(c): copper alloy containing up to 4% lead by weight                          |
| <b>Clock position</b>                          | 9   | <b>China RoHs - EFUP</b>         | 50   |
| <b>Size</b>                                    | Socket fixing centre distance 88 x 230 mm   | <b>REACH SVHC substances</b>     | Yes<br>Lead  |
| <b>Specification</b>                           | Sectionable fuse carrier 10 x 38 mm   | <b>SCIP number</b>               | F6799547-ab84-42f2-938f-233ba663766d   |
| Technical data                                 |   | Approvals / Standards            |  |
| <b>Current</b>                                 | 32 A  | <b>Reference standard</b>        | EN 60309-1, -2 e -4  |
| <b>Voltage</b>                                 | 380 ÷ 415 V   | General ordering information     |  |
| <b>IP degree of protection</b>                 | IP55  | <b>EAN13 code</b>                | 8015747089029  |
| Further technical details                      |   | Packaging Information            |  |
| <b>Weight</b>                                  | 685,00 g  | <b>Sub-packaging length</b>      | 116,00 mm  |
| <b>Operating temperature range (min, max)</b>  | -25°C ... +40°C   | <b>Sub-packaging height</b>      | 103,00 mm  |
| <b>IK rating (impact degree of protection)</b> | IK08  | <b>Sub-packaging width</b>       | 230,00 mm  |
|  |   | <b>Sub-packaging weight</b>      | 0,69 kg  |
|  |   | <b>Sub-packaging volume</b>      | 2,75 dm <sup>3</sup>   |
|  |   | <b>Sub-packaging description</b> | Carton box   |
|  |   | <b>Sub-packaging quantity</b>    | 1 Pcs  |
|  |   | <b>Sub-packaging EAN barcode</b> | 8015747089036  |

Part number


# SQV 3293.5



Catalogue drawings



Catalogue drawings

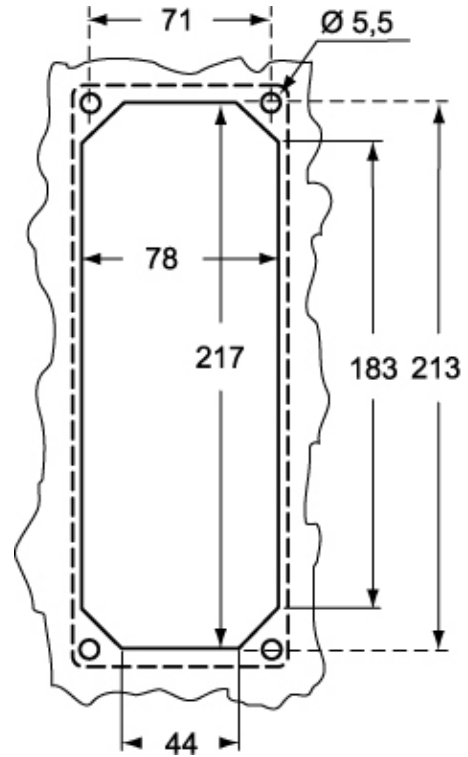

| SQV.5 |        | A   |
|-------|--------|-----|
| 32A   | 2P+⊕   | 92  |
|       | 3P+⊕   | 92  |
|       | 3P+N+⊕ | 100 |