

Part number

TM 1664 SSP



Interlocked switched socket-outlet, TM series,
3 poles + PE, 6 h (red), 16 A, 380 ÷ 415 V,
without fuse-carrier, without base box


Product description		Material properties	
Product type	Interlocked switched socket-outlet	Colour	RAL 7012 grey, RAL 3000 red
Series	TM..SSP/KSSP	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	3 poles + 	China RoHs - EFUP	50
Clock position	6	REACH SVHC substances	Yes Lead
Size	114 x 255 mm fixing distance, for assembly in single or multiple boxes	SCIP number	Ce861c8d-b979-403b-96d9-80aef6dc281d
Specification	Without fuse-carrier Without base box	Approvals / Standards	
Technical data		Reference standard	EN 60309-1, -2 e -4
Current	16 A	General ordering information	
Voltage	380 ÷ 415 V	EAN13 code	8015747100793
IP degree of protection	IP66 / IP67	Packaging Information	
Further technical details		Packaging weight	9,27 kg
Weight	1.030,00 g	Packaging volume	52,36 dm ³
Operating temperature range (min, max)	-25°C ... +40°C	Packaging description	Carton box
UL 94 flammability rating	V-2	Packaging quantity	9 Pcs
IK rating (impact degree of protection)	IK10	Packaging EAN code	8015747103343
		Sub-packaging length	95,00 mm
		Sub-packaging height	40,00 mm
		Sub-packaging width	253,00 mm
		Sub-packaging weight	1,03 kg
		Sub-packaging volume	0,96 dm ³
		Sub-packaging description	Plastic packaging
		Sub-packaging quantity	1 Pcs
		Sub-packaging EAN barcode	8015747103350

Part number

TM 1664 SSP



Catalogue drawings

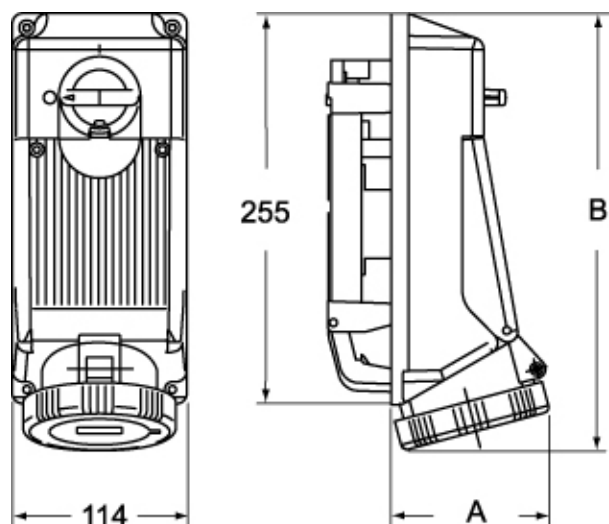

	A	B
2P+⊕	83	276
3P+⊕	85	276
3P+N+⊕	90	277