

Part number

# TM 1675 SIR



Interlocked switched socket-outlet, TM series, 3 poles + N + PE, 7 h (black), 16 A, 277/480 ÷ 288/500 V, with compartment for modular units, 4,5 DIN-rail modules EN 60715, without base box

| Product description                     |                                                                                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------------------|
| Product type                            | Interlocked switched socket-outlet                                                              |
| Series                                  | TM..SIR/KSIR                                                                                    |
| N. of poles                             | 3 poles + N +  |
| Clock position                          | 7                                                                                               |
| Specification                           | With compartment for modular units, 4,5 DIN-rail modules EN 60715<br>Without base box           |
| Technical data                          |                                                                                                 |
| Current                                 | 16 A                                                                                            |
| Voltage                                 | 277/480 ÷ 288/500 V                                                                             |
| IP degree of protection                 | IP66 / IP67                                                                                     |
| Further technical details               |                                                                                                 |
| Weight                                  | 1.070,00 g                                                                                      |
| Operating temperature range (min, max)  | -25°C ... +40°C                                                                                 |
| UL 94 flammability rating               | V-2                                                                                             |
| IK rating (impact degree of protection) | IK10                                                                                            |


| Material properties          |                               |
|------------------------------|-------------------------------|
| Colour                       | RAL 7012 grey, RAL 9005 black |
| Approvals / Standards        |                               |
| Reference standard           | EN 60309-1, -2 e -4           |
| General ordering information |                               |
| EAN13 code                   | 8015747090384                 |
| Packaging Information        |                               |
| Sub-packaging weight         | 1,07 kg                       |
| Sub-packaging description    | Carton tray                   |
| Sub-packaging quantity       | 1 Pcs                         |
| Sub-packaging EAN barcode    | 8015747108485                 |

Part number

# TM 1675 SIR



Catalogue drawings

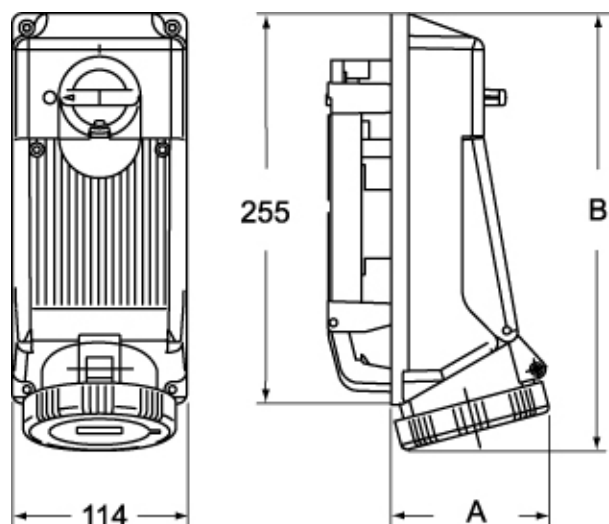

|               | <b>A</b> | <b>B</b> |
|---------------|----------|----------|
| <b>2P+⊕</b>   | 83       | 276      |
| <b>3P+⊕</b>   | 85       | 276      |
| <b>3P+N+⊕</b> | 90       | 277      |