

Part number

# TM 3234KSP



Interlocked switched socket-outlet, TM series,  
3 poles + PE, 3 h (red), 32 A, 380 ÷ 380 V,  
without fuse-carrier, with base box



| Product description                     |                                                                                             | Material properties          |                                                                                |
|-----------------------------------------|---------------------------------------------------------------------------------------------|------------------------------|--------------------------------------------------------------------------------|
| Product type                            | Interlocked switched socket-outlet                                                          | Colour                       | RAL 7012 grey, RAL 3000 red                                                    |
| Series                                  | TM..SP/KSP                                                                                  | RoHs conformity              | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| N. of poles                             | 3 poles +  | China RoHs - EFUP            | 50                                                                             |
| Clock position                          | 3                                                                                           | REACH SVHC substances        | Yes<br>Lead                                                                    |
| Specification                           | Without fuse-carrier<br>With base box                                                       | SCIP number                  | Ce861c8d-b979-403b-96d9-80aef6dc281d                                           |
| Technical data                          |                                                                                             | Approvals / Standards        |                                                                                |
| Current                                 | 32 A                                                                                        | Reference standard           | EN 60309-1, -2 e -4                                                            |
| Voltage                                 | 380V (50Hz.) 440V (60Hz.)                                                                   | General ordering information |                                                                                |
| IP degree of protection                 | IP66 / IP67                                                                                 | EAN13 code                   | 8015747137188                                                                  |
| Further technical details               |                                                                                             | Packaging Information        |                                                                                |
| Weight                                  | 1.400,00 g                                                                                  | Packaging length             | 385,00 mm                                                                      |
| Operating temperature range (min, max)  | -25°C ... +40°C                                                                             | Packaging height             | 320,00 mm                                                                      |
| UL 94 flammability rating               | V-2                                                                                         | Packaging width              | 485,00 mm                                                                      |
| IK rating (impact degree of protection) | IK10                                                                                        | Packaging weight             | 12,60 kg                                                                       |
|                                         |                                                                                             | Packaging volume             | 59,75 dm³                                                                      |
|                                         |                                                                                             | Packaging description        | Carton box                                                                     |
|                                         |                                                                                             | Packaging quantity           | 9 Pcs                                                                          |
|                                         |                                                                                             | Packaging EAN code           | 8015747137249                                                                  |
|                                         |                                                                                             | Sub-packaging weight         | 1,40 kg                                                                        |
|                                         |                                                                                             | Sub-packaging description    | Carton tray                                                                    |
|                                         |                                                                                             | Sub-packaging quantity       | 1 Pcs                                                                          |
|                                         |                                                                                             | Sub-packaging EAN barcode    | 8015747137256                                                                  |

Part number

# TM 3234KSP



Catalogue drawings

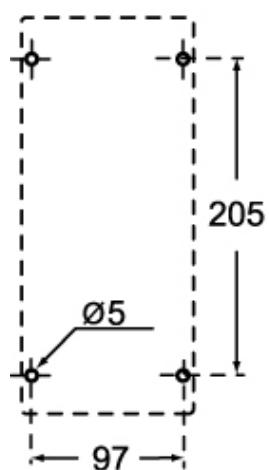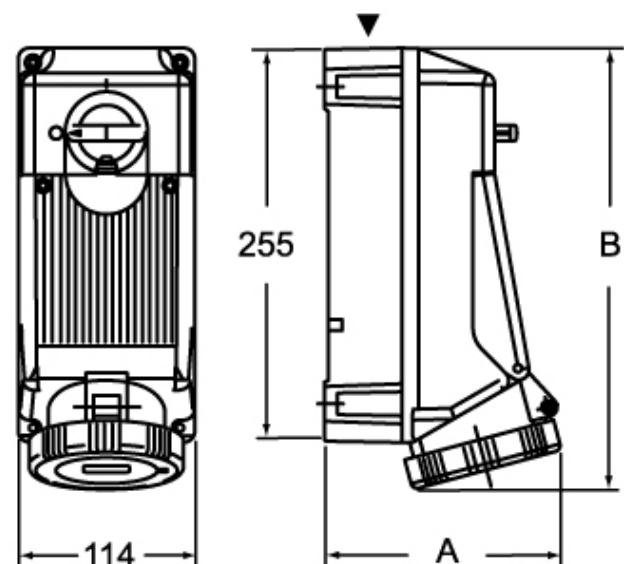

|        | A   | B   |
|--------|-----|-----|
| 2P+⊕   | 133 | 276 |
| 3P+⊕   | 135 | 276 |
| 3P+N+⊕ | 140 | 277 |