


Part number

BK 1665



Interlocked switched socket-outlet, BK series, 3 poles + N + PE, 6 h (red), 16 A, 200/346 ÷ 240/415 V, sectionable fuse carrier 10 x 38 mm

Product description

Product type	Interlocked switched socket-outlet
Series	BK
N. of poles	3 poles + N + 
Clock position	6
Size	Socket centre distance 114 x 228 mm
Specification	Sectionable fuse carrier 10 x 38 mm

Technical data

Current	16 A
Voltage	200/346 ÷ 240/415 V
IP degree of protection	IP67

Further technical details

Weight	1.338,00 g
Operating temperature range (min, max)	-25°C ... +40°C
IK rating (impact degree of protection)	IK10

Material properties

Colour	RAL 7035 grey, RAL 3000 red
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	F6799547-ab84-42f2-938f-233ba663766d

Approvals / Standards

Reference standard	EN 60309-1, -2 e -4
---------------------------	---------------------

General ordering information

EAN13 code	8015747004480
-------------------	---------------

Packaging Information


Packaging length	400,00 mm
Packaging height	300,00 mm
Packaging width	400,00 mm
Packaging weight	13,50 kg
Packaging volume	48,00 dm ³
Packaging description	Carton box
Packaging quantity	9 Pcs
Packaging EAN code	8015747004497
Sub-packaging length	116,00 mm
Sub-packaging height	130,00 mm
Sub-packaging width	230,00 mm
Sub-packaging weight	1,50 kg
Sub-packaging volume	3,47 dm ³
Sub-packaging description	Carton box
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747004503

Part number

BK 1665



Catalogue drawings

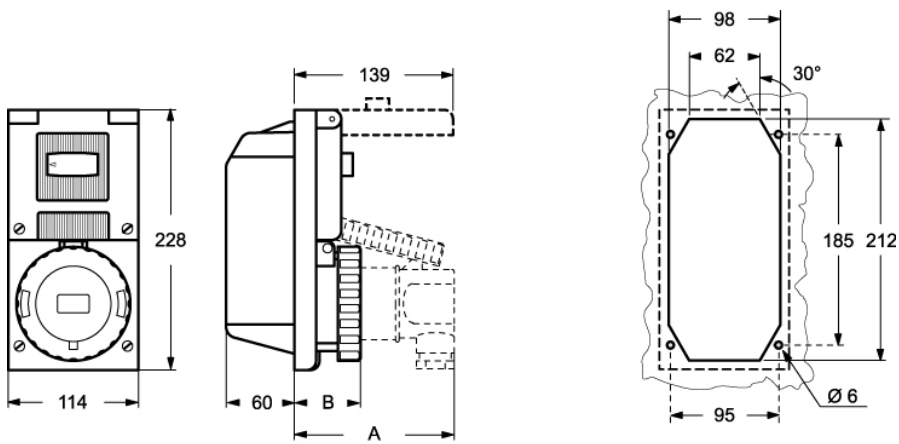

BK		A	B
16A	2P + ⊕	105	50
	3P + ⊕	105	50
	3P + N + ⊕	110	50
32A	2P + ⊕	140	58
	3P + ⊕	140	58
	3P + N + ⊕	140	58

Notes

Dimensions shown in mm are not binding and may be changed without notice.
