


Part number  
**BK 3225**



Interlocked switched socket-outlet, BK series,  
3 poles + N + PE, 2 h (green), 32 A, > 50 V,  
sectionable fuse carrier 10 x 38 mm

**Product description**

<b>Product type</b>	Interlocked switched socket-outlet
<b>Series</b>	BK
<b>N. of poles</b>	3 poles + N + 
<b>Clock position</b>	2
<b>Specification</b>	Sectionable fuse carrier 10 x 38 mm

**Technical data**

<b>Current</b>	32 A
<b>Voltage</b>	> 50 V
<b>IP degree of protection</b>	IP67

**Further technical details**

<b>Operating temperature range (min, max)</b>	-25°C ... +40°C
<b>IK rating (impact degree of protection)</b>	IK10

**Material properties**

<b>Colour</b>	RAL 7035 grey
---------------	---------------

**Approvals / Standards**

<b>Reference standard</b>	EN 60309-1, -2 e -4
---------------------------	---------------------

**General ordering information**


<b>EAN13 code</b>	8015747147187
-------------------	---------------

Part number

# BK 3225



Catalogue drawings

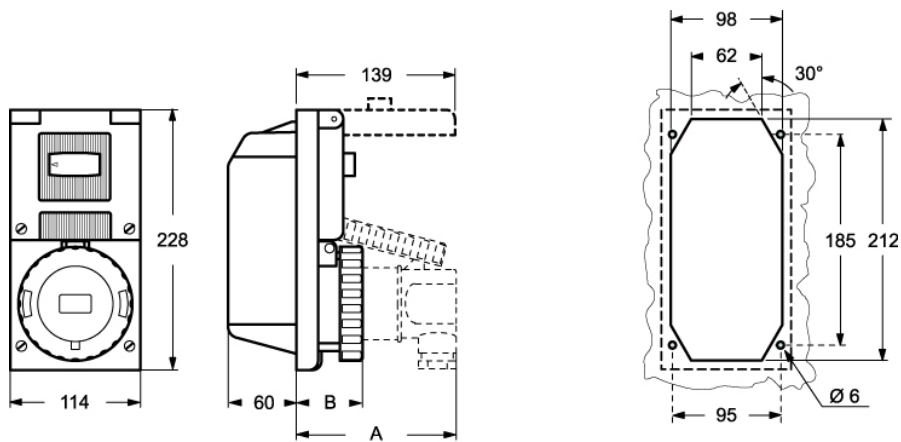

BK		A	B
16A	2P + ⊕	105	50
	3P + ⊕	105	50
	3P + N + ⊕	110	50
32A	2P + ⊕	140	58
	3P + ⊕	140	58
	3P + N + ⊕	140	58

## Notes

Dimensions shown in mm are not binding and may be changed without notice.