


Part number
BK 3244



Interlocked switched socket-outlet, BK series,
 3 poles + PE, 4 h (yellow), 32 A, 100 ÷ 130 V,
 sectionable fuse carrier 10 x 38 mm


Product description		Material properties	
Product type	Interlocked switched socket-outlet	Colour	RAL 7035 grey, RAL 1021 yellow
Series	BK		Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	3 poles + 	RoHs conformity	6(c): copper alloy containing up to 4% lead by weight
Clock position	4	China RoHs - EFUP	50
Size	Socket centre distance 114 x 228 mm	REACH SVHC substances	Yes
Specification	Sectionable fuse carrier 10 x 38 mm		Lead
Technical data		SCIP number	F6799547-ab84-42f2-938f-233ba663766d
Current	32 A	Approvals / Standards	
Voltage	100 ÷ 130 V	Reference standard	EN 60309-1, -2 e -4
IP degree of protection	IP67	General ordering information	
Further technical details		EAN13 code	8015747004787
Weight	1.360,00 g	Packaging Information	
Operating temperature range (min, max)	-25°C ... +40°C	Sub-packaging length	116,00 mm
IK rating (impact degree of protection)	IK10	Sub-packaging height	130,00 mm
		Sub-packaging width	230,00 mm
		Sub-packaging weight	1,36 kg
		Sub-packaging volume	3,47 dm ³
		Sub-packaging description	Carton box
		Sub-packaging quantity	1 Pcs
		Sub-packaging EAN barcode	8015747004800

Part number

BK 3244



Catalogue drawings

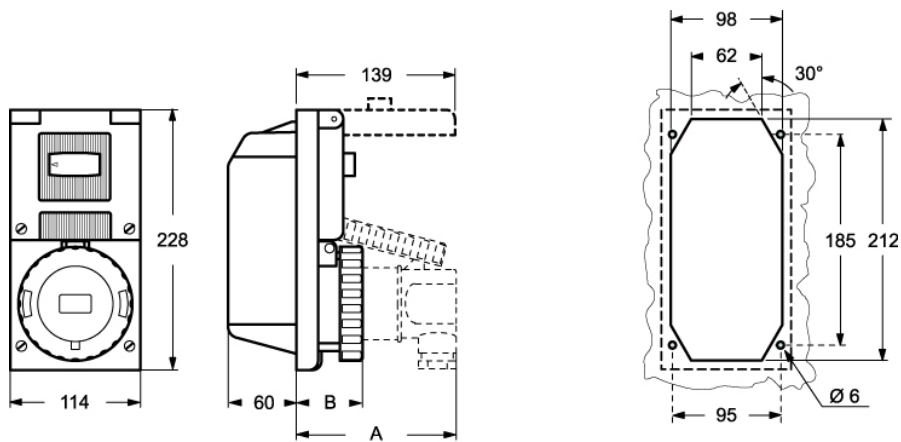

BK		A	B
16A	2P + ⊕	105	50
	3P + ⊕	105	50
	3P + N + ⊕	110	50
32A	2P + ⊕	140	58
	3P + ⊕	140	58
	3P + N + ⊕	140	58

Notes

Dimensions shown in mm are not binding and may be changed without notice.