


Part number

# CIF 2.4 A

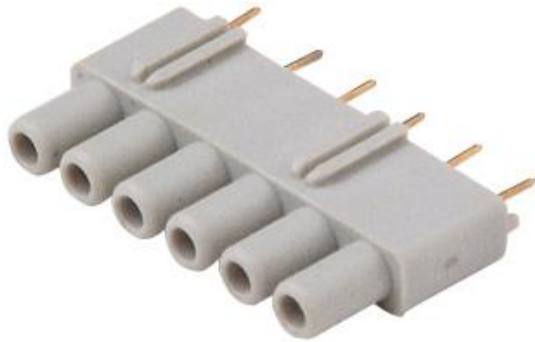

Interface for printed circuit, 6 poles, for up to 2,4 mm thick PCB

#### Product description

<b>Product type</b>	Interface for printed circuit
<b>N. of poles</b>	6 poles
<b>Specification</b>	For up to 2,4 mm thick PCB

#### Technical data

<b>Current</b>	6 A
<b>Contact type</b>	Turned silver plated

#### Further technical details

<b>Weight</b>	2,70 g
<b>Operating temperature range (min, max)</b>	-40°C...+125°C

#### Material properties

<b>Main material</b>	Polycarbonate (PC)
<b>Other materials</b>	Contacts: copper alloy
<b>Colour</b>	RAL 7032 grey
<b>RoHs conformity</b>	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
<b>China RoHs - EFUP</b>	50
<b>REACH SVHC substances</b>	Yes Lead
<b>SCIP number</b>	022a8a72-7a4c-443a-a1ad-2461ccc7884c

#### Approvals / Standards

<b>Certifications</b>	DNV
<b>UL</b>	ECBT2
<b>cUL</b>	ECBT8

#### General ordering information

<b>EAN13 code</b>	8015747140560
<b>eCl@ss 8.1</b>	27449290
<b>ETIM 7.0</b>	EC002637

#### Packaging Information

<b>Packaging length</b>	132,00 mm
<b>Packaging height</b>	108,00 mm
<b>Packaging width</b>	210,00 mm
<b>Packaging weight</b>	1,88 kg
<b>Packaging volume</b>	2,99 dm <sup>3</sup>
<b>Packaging description</b>	Carton box
<b>Packaging quantity</b>	500 Pcs
<b>Packaging EAN code</b>	8015747225533
<b>Sub-packaging length</b>	1,00 mm
<b>Sub-packaging height</b>	1,00 mm
<b>Sub-packaging width</b>	1,00 mm
<b>Sub-packaging weight</b>	0,38 kg
<b>Sub-packaging description</b>	Plastic box
<b>Sub-packaging quantity</b>	100 Pcs
<b>Sub-packaging EAN barcode</b>	8015747140591

Part number

# CIF 2.4 A



---

## Notes

Dimensions shown in mm are not binding and may be changed without notice.

---

### California Proposition 65 Information



### WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

---