

Part number  
**CKSM 04**




Male insert, CKS series, spring terminal connection, 4 poles + PE, 10 A 400 V 4 kV 3, size "21.21"

|   |   |                                     |  |
|---|---|-------------------------------------|--|
| <b>Product description</b>                    |   | <b>Material properties</b>          |  |
| <b>Product type</b>                           | Insert  | <b>Main material</b>                | Polycarbonate (PC)   |
| <b>Series</b>                                 | CKS   | <b>Other materials</b>              | Contacts: copper alloy<br>Gasket: NBR  |
| <b>Connection type</b>                        | Spring terminal connection                                      | <b>Colour</b>                       | RAL 7032 grey  |
| <b>Gender</b>                                 | Male  | <b>RoHs conformity</b>              | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| <b>N. of poles</b>                            | 4 poles +   | <b>China RoHs - EFUP</b>            | 50   |
| <b>Size</b>                                   | Size "21.21"  | <b>REACH SVHC substances</b>        | Yes<br>Lead  |
| <b>Technical data</b>                         |   | <b>SCIP number</b>                  | 1a9c93ff-0445-4a16-81e3-1609ac5274d6   |
| <b>Current</b>                                | 10 A  | <b>Approvals / Standards</b>        |  |
| <b>Voltage</b>                                | 400 V   | <b>Reference standard</b>           | EN 61984:2009-06   |
| <b>Rated impulse withstand voltage</b>        | 4 kV  | <b>Certifications</b>               | CSA, CQC, DNV, BV, EAC   |
| <b>Pollution degree</b>                       | 3   | <b>UL</b>                           | ECBT2  |
| <b>Rated voltage according to UL/CSA</b>      | 600 V   | <b>cUL</b>                          | ECBT8  |
| <b>Wire cross-section</b>                     | 0,14 mm <sup>2</sup> - 2,50 mm <sup>2</sup>                     | <b>General ordering information</b> |  |
| <b>AWG size</b>                               | 26 - 14   | <b>EAN13 code</b>                   | 8015747164382  |
| <b>Contact type</b>                           | Turned silver plated  | <b>ETIM 7.0</b>                     | EC000438   |
| <b>IP degree of protection</b>                | IP20 without enclosure, IP44/IP66/IP67/IP68/IP69 with enclosure | <b>Packaging Information</b>        |  |
| <b>Further technical details</b>              |   | <b>Packaging length</b>             | 210,00 mm  |
| <b>Characteristics according to EN 61984</b>  | 10A 400V 4kV 3; 10A 690V 4kV 2                                  | <b>Packaging height</b>             | 200,00 mm  |
| <b>Mating cycles</b>                          | ≥ 500   | <b>Packaging width</b>              | 130,00 mm  |
| <b>Insulation resistance</b>                  | ≥ 10 GΩ   | <b>Packaging weight</b>             | 3,06 kg  |
| <b>Contact resistance</b>                     | ≤ 3 mΩ  | <b>Packaging volume</b>             | 5,46 dm <sup>3</sup>   |
| <b>Weight</b>                                 | 14,80 g   | <b>Packaging description</b>        | Carton box   |
| <b>Operating temperature range (min, max)</b> | -40 °C ... +125 °C  | <b>Packaging quantity</b>           | 200 Pcs  |
| <b>Conductors stripping length</b>            | 9...11 mm   | <b>Packaging EAN code</b>           | 8015747164436  |
| <b>UL 94 flammability rating</b>              | V-0   | <b>Sub-packaging length</b>         | 197,00 mm  |
| <b>Torque for main contact</b>                | M2,5: 0.4 Nm; 3.5 lb.in (0,5 x 3mm )                            | <b>Sub-packaging height</b>         | 35,00 mm   |
| <b>Tightening torque for PE connection</b>    | M4: 1,2 Nm, 10,6 lb.in (Ph2 or 1,0x5,5mm )                      | <b>Sub-packaging width</b>          | 124,00 mm  |
| <b>Tightening torque for fixing screws</b>    | M3: 0,5 Nm; 4,4 lb.in (Ph1 or 0,8 x 5,5 mm)                     | <b>Sub-packaging weight</b>         | 0,61 kg  |
|   |   | <b>Sub-packaging volume</b>         | 0,85 dm <sup>3</sup>   |
|   |   | <b>Sub-packaging description</b>    | Carton tray  |
|   |   | <b>Sub-packaging quantity</b>       | 40 Pcs   |
|   |   | <b>Sub-packaging EAN barcode</b>    | 8015747164443  |



Part number  
**CKSM 04**



Catalogue drawings

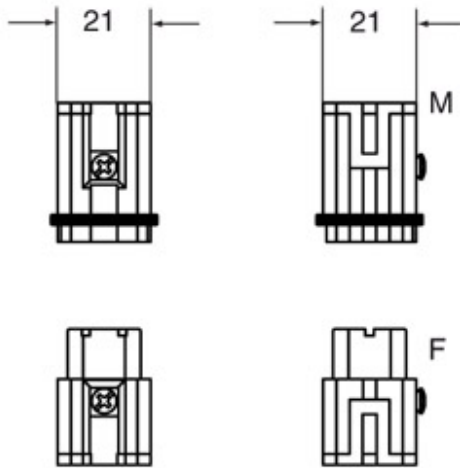



Catalogue drawings

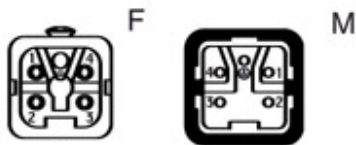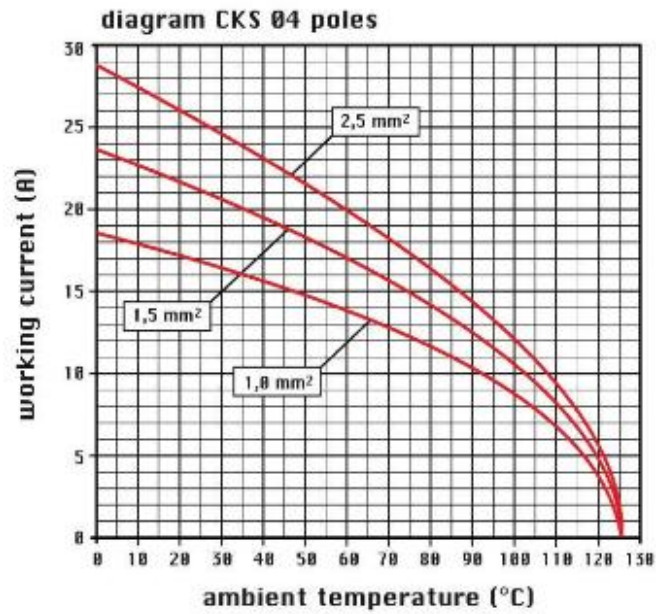

Notes

Dimensions shown in mm are not binding and may be changed without notice.

Spring terminal connections



Rear top entry of wires for a more easier wiring.

---

**California Proposition 65 Information**



**WARNING**

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

---

**California Proposition 65 Information**



**WARNING**

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

---