


Part number

CR BDSH6A

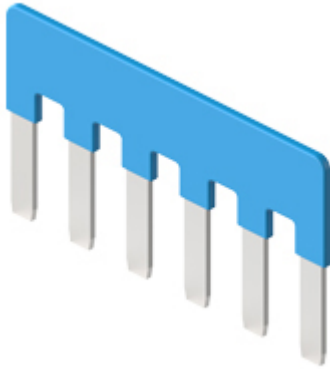

Bridge, 6 poles, for CDSH-SQUICH® inserts,
light blue colour

Product description	
Product type	Bridge
N. of poles	6 poles
Specification	For CDSH-SQUICH® inserts Light blue colour
Technical data	
Current	10 A
Voltage	50 V
Rated impulse withstand voltage	0,8 kV
Pollution degree	3
Further technical details	
Characteristics according to EN 61984	10 A 50 V 0,8 kV 3
Weight	1,50 g
Operating temperature range (min, max)	-40 °C ... +125 °C


General ordering information	
EAN13 code	8015747272049
eCl@ss 8.1	27141140
ETIM 7.0	EC000489
Packaging Information	
Sub-packaging weight	0,02 kg
Sub-packaging description	Plastic bag
Sub-packaging quantity	10 Pcs
Sub-packaging EAN barcode	8015747274500

Part number

CR BDSH6A



Catalogue drawings

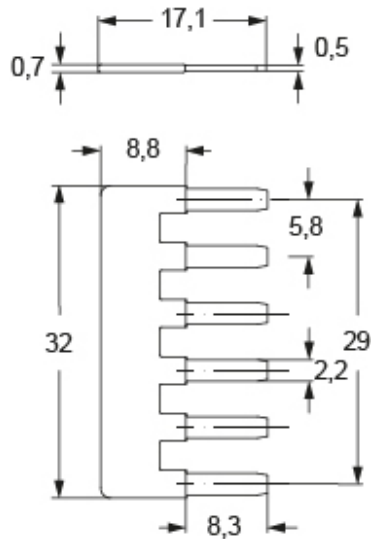

Notes

CR BDSH parallel bridges shall be used only with unprepared conductors up to 1,5 mm² / 16 AWG.

The rated current applies to the conductor used to feed the CR BDSH parallel bridge, it applies to the above indicated maximum wire size and is distributed to all pins in parallel in a manner inversely proportional to the impedance of the served branch circuit. When all branches are with identical impedance, the current is equally divided by the number of served branches in parallel.

Dimensions shown in mm are not binding and may be changed without notice.