


Part number

# CX 01 9VF2

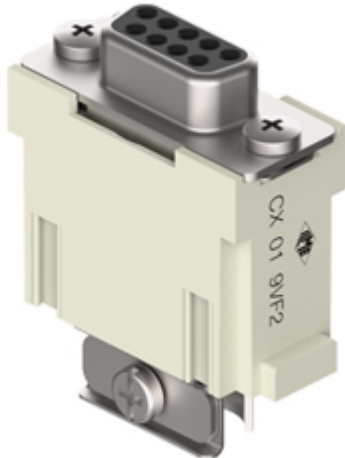

Female modular insert, Mixo Data series, D-SUB, 9 poles, 1 module, 5 A 50 V 0,8 kV 3, crimp, shielded, 2 cable entries


| Product description                    |                                                            | Material properties          |                      |
|----------------------------------------|------------------------------------------------------------|------------------------------|----------------------|
| Product type                           | Modular insert                                             | Main material                | Polycarbonate (PC)   |
| Series                                 | Mixo Data                                                  | Colour                       | RAL 7032 grey        |
| Connection type                        | D-SUB                                                      | RoHs conformity              | Compliant            |
| Gender                                 | Female                                                     | China RoHs - EFUP            | E                    |
| N. of poles                            | 9 poles                                                    | REACH SVHC substances        | No                   |
| Size                                   | 1 module                                                   | General ordering information |                      |
| Specification                          | 2 cable entries<br>Crimp, shielded                         | EAN13 code                   | 8015747271752        |
| Technical data                         |                                                            | eCl@ss 8.1                   | 27440205             |
| Current                                | 5 A                                                        | ETIM 7.0                     | EC000438             |
| Voltage                                | 50 V                                                       | Packaging Information        |                      |
| Rated impulse withstand voltage        | 0,8 kV                                                     | Packaging length             | 112,00 mm            |
| Pollution degree                       | 3                                                          | Packaging height             | 95,00 mm             |
| IP degree of protection                | IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure | Packaging width              | 117,00 mm            |
| Further technical details              |                                                            | Packaging weight             | 0,24 kg              |
| Characteristics according to EN 61984  | 5 A 50 V 0,8 kV 3                                          | Packaging volume             | 1,24 dm <sup>3</sup> |
| Weight                                 | 19,00 g                                                    | Packaging description        | Carton box           |
| Operating temperature range (min, max) | -40°C...+70°C                                              | Packaging quantity           | 10 Pcs               |
|                                        |                                                            | Packaging EAN code           | 8015747271769        |
|                                        |                                                            | Sub-packaging weight         | 0,02 kg              |
|                                        |                                                            | Sub-packaging description    | Plastic bag          |
|                                        |                                                            | Sub-packaging quantity       | 1 Pcs                |
|                                        |                                                            | Sub-packaging EAN barcode    | 8015747271776        |

Part number

# CX 01 9VF2



## Catalogue drawings

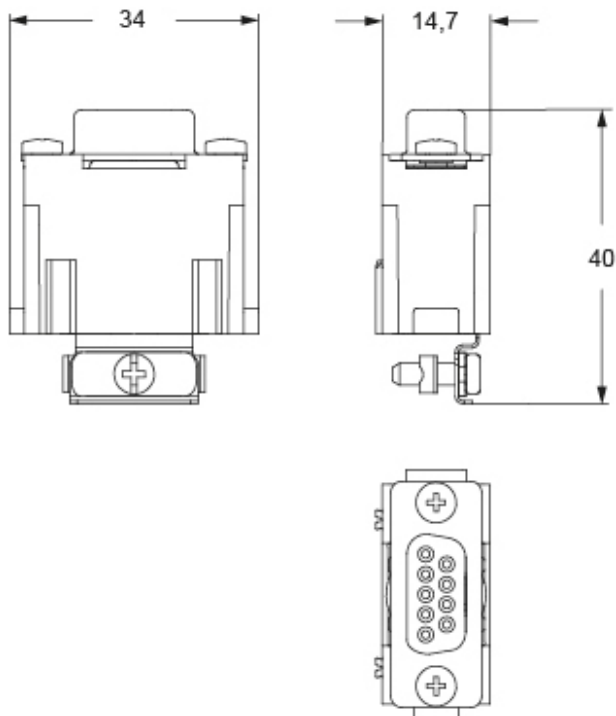

## Notes

Standard modular inserts:

-in combination with standard contacts and standard frames (CX ... TF/TM); must be mounted either in traditional enclosures or in COB panel supports (both up to 500 matings).

Dimensions shown in mm are not binding and may be changed without notice.

### California Proposition 65 Information



### WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).