

Part number

# CX 01 GM



Male modular insert, Mixo series, crimp connection, 1 pole, 1 module, 100 A 830 V 8 kV 3


Product description		Material properties	
<b>Product type</b>	Modular insert	<b>Main material</b>	Polycarbonate
<b>Series</b>	Mixo	<b>Colour</b>	RAL 7032 grey
<b>Connection type</b>	Crimp connection	<b>RoHs conformity</b>	Compliant
<b>Gender</b>	Male	<b>China RoHs - EFUP</b>	E
<b>N. of poles</b>	1 pole	<b>REACH SVHC substances</b>	No
<b>Size</b>	1 module	Approvals / Standards	
Technical data		<b>Certifications</b>	DNV, BV, EAC
<b>Current</b>	100 A	<b>UL</b>	ECBT2
<b>Voltage</b>	830 V	<b>cUL</b>	ECBT8
<b>Rated impulse withstand voltage</b>	8 kV	General ordering information	
<b>Pollution degree</b>	3	<b>EAN13 code</b>	8015747252140
<b>Rated voltage according to UL/CSA</b>	600 V	<b>eCl@ss 8.1</b>	27440205
<b>IP degree of protection</b>	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure	<b>ETIM 7.0</b>	EC000438
Further technical details		Packaging Information	
<b>Characteristics according to EN 61984</b>	100A 830V 8kV 3	<b>Packaging weight</b>	0,09 kg
<b>Mating cycles</b>	≥ 500	<b>Packaging volume</b>	1,24 dm <sup>3</sup>
<b>Insulation resistance</b>	≥ 10 GΩ	<b>Packaging description</b>	Carton box
<b>Contact resistance</b>	≤ 0,3 mΩ	<b>Packaging quantity</b>	5 Pcs
<b>Weight</b>	14,50 g	<b>Packaging EAN code</b>	8015747252164
<b>Operating temperature range (min, max)</b>	-40 °C ... +125 °C	<b>Sub-packaging length</b>	90,00 mm
<b>UL 94 flammability rating</b>	V-0	<b>Sub-packaging height</b>	66,00 mm
		<b>Sub-packaging width</b>	110,00 mm
		<b>Sub-packaging weight</b>	0,02 kg
		<b>Sub-packaging volume</b>	0,65 dm <sup>3</sup>
		<b>Sub-packaging description</b>	Plastic bag
		<b>Sub-packaging quantity</b>	1 Pcs
		<b>Sub-packaging EAN barcode</b>	8015747252171

Part number

# CX 01 GM




Catalogue drawings

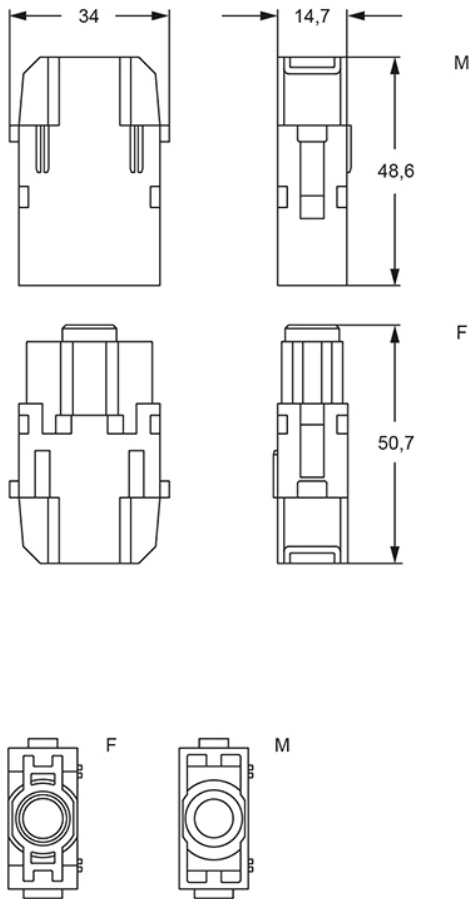

Derating curves

## CX 01 poles connector inserts Maximum current load derating diagram

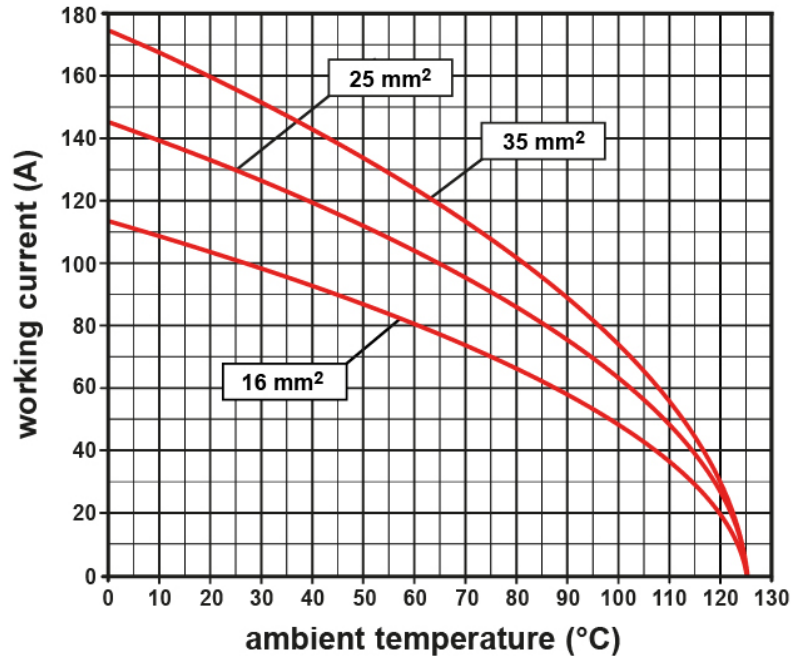

## Notes

Standard modular inserts:

-in combination with standard contacts and standard frames (CX ... TF/TM); must be mounted either in traditional enclosures or in COB panel supports (both up to 500 matings).

Dimensions shown in mm are not binding and may be changed without notice.