

Part number

CX 01 JF




Female modular insert, Mixo Data series, RJ45, 2 modules, without connector, for 1 RJ45 connector and 4 10 A CD contacts

| Product description | | Material properties | |
|---|--|-------------------------------------|------------------------|
| Product type | Modular insert | Main material | Polycarbonate (PC) |
| Series | Mixo Data | Colour | RAL 7032 grey |
| Connection type | RJ45 | RoHs conformity | Compliant |
| Gender | Female | China RoHs - EFUP | E |
| N. of poles | 1 seat for RJ45 connector | REACH SVHC substances | No |
| Auxiliary poles | 4D | Approvals / Standards | |
| Size | 2 modules | Reference standard | EN 61984:2009-06 |
| Specification | For 1 RJ45 connector and 4 10 A CD contacts RJ45, adapter for Cat. 6A female connector | Certifications | CSA, CQC, DNV, BV, EAC |
| Technical data | | UL | ECBT2 |
| Current | 1 A | cUL | ECBT8 |
| Voltage | 50 V | General ordering information | |
| Rated voltage according to UL/CSA | 600V | EAN13 code | 8015747166003 |
| IP degree of protection | IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure | eCl@ss 8.1 | 27440205 |
| Further technical details | | ETIM 7.0 | EC000438 |
| Characteristics according to EN 61984 | 10A 250V 4kV 3 | Packaging Information | |
| Insulation resistance | ≥ 10 GΩ | Packaging length | 350,00 mm |
| Contact resistance | ≤ 3 mΩ | Packaging height | 105,00 mm |
| Weight | 20,00 g | Packaging width | 145,00 mm |
| Operating temperature range (min, max) | -40°C ... +120°C | Packaging weight | 1,30 kg |
| UL 94 flammability rating | V-0 | Packaging volume | 5,33 dm ³ |
| | | Packaging description | Carton box |
| | | Packaging quantity | 60 Pcs |
| | | Packaging EAN code | 8015747221023 |
| | | Sub-packaging length | 35,00 mm |
| | | Sub-packaging height | 40,00 mm |
| | | Sub-packaging width | 155,00 mm |
| | | Sub-packaging weight | 0,11 kg |
| | | Sub-packaging volume | 0,22 dm ³ |
| | | Sub-packaging description | Carton tray |
| | | Sub-packaging quantity | 5 Pcs |
| | | Sub-packaging EAN barcode | 8015747166041 |

Part number
CX 01 JF



Catalogue drawings

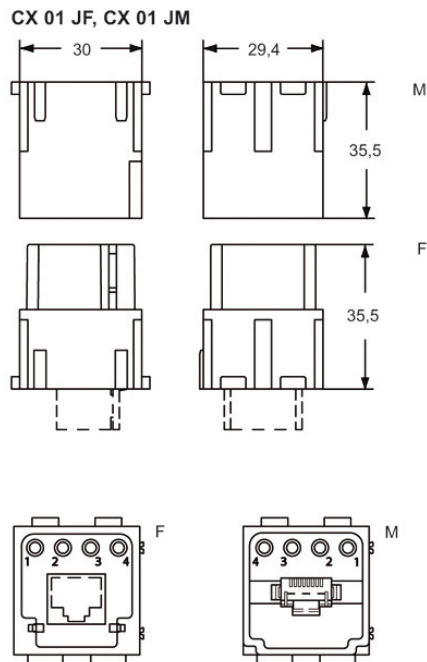

Notes

Standard modular inserts:

-in combination with standard contacts and standard frames (CX ... TF/TM); must be mounted either in traditional enclosures or in COB panel supports (both up to 500 matings).

Dimensions shown in mm are not binding and may be changed without notice.
