

Part number

CX 01 UM



Male modular insert, Mixo Data series, USB, 1 module, without connector

Product description

Product type	Modular insert
Series	Mixo Data
Connection type	USB
Gender	Male
N. of poles	1USB
Size	1 module
Specification	Without connector

Technical data

Current	1 A
Rated voltage according to UL/CSA	50V

Further technical details

Characteristics according to EN 61984	50V 0.8kV 3
Insulation resistance	$\geq 10 \text{ G}\Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Weight	10,00 g
Operating temperature range (min, max)	-25°C ... +80°C
UL 94 flammability rating	V-0

Material properties

Main material	Polycarbonate (PC)
Colour	RAL 7032 grey
RoHs conformity	Compliant
China RoHs - EFUP	E
REACH SVHC substances	No

Approvals / Standards

Certifications	CSA, DNV, BV
UL	ECBT2
cUL	ECBT8

General ordering information

EAN13 code	8015747175043
eCl@ss 8.1	27440205
ETIM 7.0	EC000438

Packaging Information


Packaging length	112,00 mm
Packaging height	95,00 mm
Packaging width	117,00 mm
Packaging weight	0,15 kg
Packaging volume	1,24 dm ³
Packaging description	Carton box
Packaging quantity	10 Pcs
Packaging EAN code	8015747175074
Sub-packaging weight	0,02 kg
Sub-packaging description	Plastic bag
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747175081

Part number


CX 01 UM



Catalogue drawings



Catalogue drawings

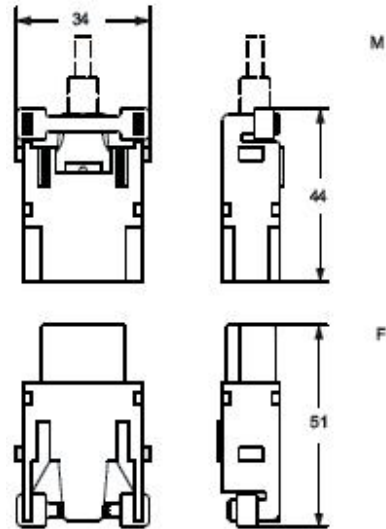

Notes

Standard modular inserts:

-in combination with standard contacts and standard frames (CX ... TF/TM); must be mounted either in traditional enclosures or in COB panel supports (both up to 500 matings).

Dimensions shown in mm are not binding and may be changed without notice.