

Part number

CX 01 YPEM



Male modular insert, Mixo series, crimp connection, 1 PE pole, 2 modules, PE module for earth termination




Product description		Material properties	
Product type	Modular insert	Main material	Polycarbonate
Series	Mixo	Colour	RAL 7032 grey
Connection type	Crimp connection	RoHs conformity	Compliant
Gender	Male	China RoHs - EFUP	E
N. of poles	1 PE pole	REACH SVHC substances	No
Size	2 modules	Approvals / Standards	
Specification	PE module for earth termination	Certifications	CSA, CQC, DNV, BV, EAC
Technical data		UL	ECBT2
Current	200 A	cUL	ECBT8
Rated voltage according to UL/CSA	600 V	General ordering information	
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure	EAN13 code	8015747168083
Further technical details		eCl@ss 8.1	27440205
Insulation resistance	≥ 10 GΩ	ETIM 7.0	EC000438
Contact resistance	≤ 0,2 mΩ	Packaging Information	
Weight	35,00 g	Packaging length	112,00 mm
Operating temperature range (min, max)	-40 °C ... +125 °C	Packaging height	95,00 mm
UL 94 flammability rating	V-0	Packaging width	117,00 mm
		Packaging weight	0,23 kg
		Packaging volume	1,24 dm ³
		Packaging description	Carton box
		Packaging quantity	5 Pcs
		Packaging EAN code	8015747168427
		Sub-packaging weight	0,05 kg
		Sub-packaging description	Plastic bag
		Sub-packaging quantity	1 Pcs
		Sub-packaging EAN barcode	8015747168434

Part number

CX 01 YPEM



Catalogue drawings

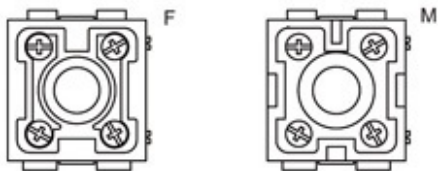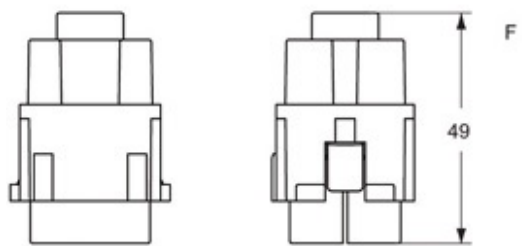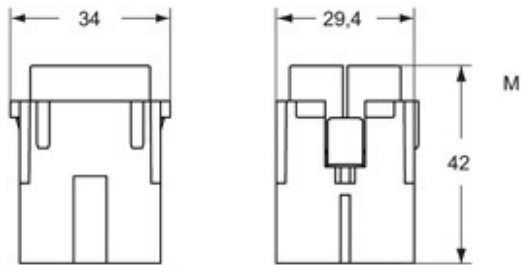

Notes

Standard modular inserts:

-in combination with standard contacts and standard frames (CX ... TF/TM); must be mounted either in traditional enclosures or in COB panel supports (both up to 500 matings).

Dimensions shown in mm are not binding and may be changed without notice.
