

Part number

CX 02 BF



Female modular insert, Mixo Bus series, coaxial, 2 modules, 50 V 0,8 kV 3, seat for 2 shielded connectors

Product description		Material properties	
Product type	Modular insert	Main material	Polycarbonate
Series	06ABS	Colour	RAL 7032 grey
Connection type	Coaxial	RoHs conformity	Compliant
Gender	Female	China RoHs - EFUP	E
Size	2 modules	REACH SVHC substances	No
Specification	Seat for 2 shielded connectors	Approvals / Standards	
Technical data		Reference standard	EN 61984:2009-06
Voltage	50 V	Certifications	CSA, CQC, DNV, EAC
Rated impulse withstand voltage	0,8 kV	UL	ECBT2
Pollution degree	3	cUL	ECBT8
Rated voltage according to UL/CSA	50 V	General ordering information	
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure	EAN13 code	8015747095914
Further technical details		eCl@ss 8.1	27440205
Characteristics according to EN 61984	50V 0.8kV 3	ETIM 7.0	EC000438
Insulation resistance	≥ 10 GΩ	Packaging Information	
Weight	11,60 g	Packaging length	350,00 mm
Operating temperature range (min, max)	-40 °C ... +125 °C	Packaging height	105,00 mm
UL 94 flammability rating	V-0	Packaging width	145,00 mm
		Packaging weight	0,99 kg
		Packaging volume	5,33 dm ³
		Packaging description	Carton box
		Packaging quantity	60 Pcs
		Packaging EAN code	8015747221047
		Sub-packaging length	35,00 mm
		Sub-packaging height	40,00 mm
		Sub-packaging width	155,00 mm
		Sub-packaging weight	0,08 kg
		Sub-packaging volume	0,22 dm ³
		Sub-packaging description	Carton tray
		Sub-packaging quantity	5 Pcs
		Sub-packaging EAN barcode	8015747095921


Part number

CX 02 BF




Catalogue drawings

CX 02 BM

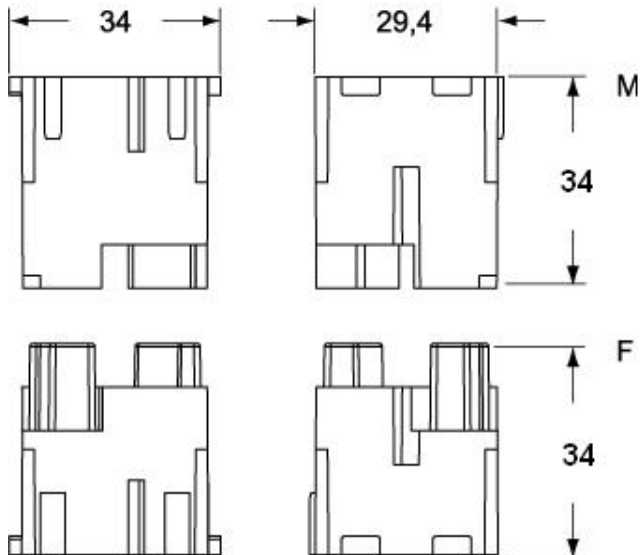

CX 02 BF

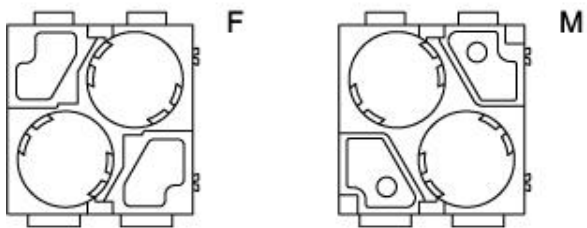

Notes

Standard modular inserts:

-in combination with standard contacts and standard frames (CX ... TF/TM); must be mounted either in traditional enclosures or in COB panel supports (both up to 500 matings).

Dimensions shown in mm are not binding and may be changed without notice.