

Part number

CX 02 P



Modular insert, Mixo series, for pneumatic contacts, 1 module, with 2 seats for tube diameter 6,0 mm

Product description	
Product type	Modular insert
Series	Mixo
Connection type	Pneumatic
N. of poles	2 poles
Size	1 module
Specification	With 2 seats for tube diameter 6,0 mm
Further technical details	
Mating cycles	≥ 500
Insulation resistance	≥ 10 GΩ
Weight	5,60 g
Operating temperature range (min, max)	-40°C ... +80°C
UL 94 flammability rating	V-0


Material properties	
Main material	Polycarbonate (PC)
Colour	RAL 5015 blue
RoHs conformity	Compliant
China RoHs - EFUP	E
REACH SVHC substances	No
Approvals / Standards	
Certifications	CSA, DNV, BV
UL	ECBT2
cUL	ECBT8
General ordering information	
EAN13 code	8015747095952
eCl@ss 8.1	27440205
ETIM 7.0	EC000438
Packaging Information	
Packaging length	180,00 mm
Packaging height	120,00 mm
Packaging width	155,00 mm
Packaging weight	0,83 kg
Packaging volume	3,35 dm ³
Packaging description	Carton box
Packaging quantity	60 Pcs
Packaging EAN code	8015747221160
Sub-packaging length	35,00 mm
Sub-packaging height	40,00 mm
Sub-packaging width	155,00 mm
Sub-packaging weight	0,14 kg
Sub-packaging volume	0,22 dm ³
Sub-packaging description	Carton tray
Sub-packaging quantity	10 Pcs
Sub-packaging EAN barcode	8015747102339

Part number


CX 02 P




Catalogue drawings

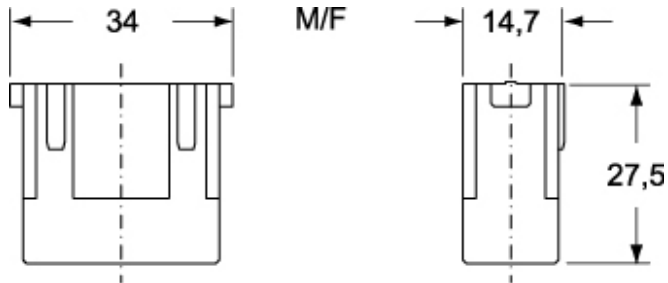

CX 03 P



CX 02 P



Notes

Warnings:

- 1) Please note that the VDE-Directives do not allow the combination of electrical and liquid connections within the same connector for clear safety reasons.
- 2) CRM/F CX code pins and guides must be used for pneumatic contacts modules. These pins also provide coding if pneumatic contacts modules are used exclusively.

Use of units for pneumatic contacts

- identical male and female modular units
- pneumatic contacts for pressure values up to 8 bar, for use with clean and dry compressed air
- contacts for gas and liquids on request (see warning)
- possibility of using tubes with different diameters in the same modular unit
- female contacts with or without closing valve
- working temperature range - 40 °C ÷ + 80 °C
- use of tubes with Ø 6 mm, and possible replacement of tubes with assembled units.

Dimensions shown in mm are not binding and may be changed without notice.