


Part number

KI 1643 RI5



Interlocked switched socket-outlet, KI series, 2 poles + PE, 4 h (yellow), 16 A, 100 ÷ 130 V, with compartment for modular units, 7 DIN-rail modules EN 60715

Product description

Product type	Interlocked switched socket-outlet
Series	KI..RI5
N. of poles	2 poles + 
Clock position	4
Size	143x343 fixing plates FC xx53 TB
Cable entry	Pg29
Specification	With compartment for modular units, 7 DIN-rail modules EN 60715

Technical data

Current	16 A
Voltage	100 ÷ 130 V
IP degree of protection	IP55

Further technical details

Weight	1.700,00 g
Operating temperature range (min, max)	-25°C ... +40°C
IK rating (impact degree of protection)	IK10

Material properties

Colour	RAL 7035 grey, RAL 1021 yellow
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ce861c8d-b979-403b-96d9-80aef6dc281d

Approvals / Standards

Reference standard	EN 60309-1, -2 e -4
---------------------------	---------------------

General ordering information

EAN13 code	8015747048330
-------------------	---------------

Packaging Information


Sub-packaging length	150,00 mm
Sub-packaging height	140,00 mm
Sub-packaging width	380,00 mm
Sub-packaging weight	1,70 kg
Sub-packaging volume	7,98 dm ³
Sub-packaging description	Carton box
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747048347

Part number

KI 1643 RI5



Catalogue drawings

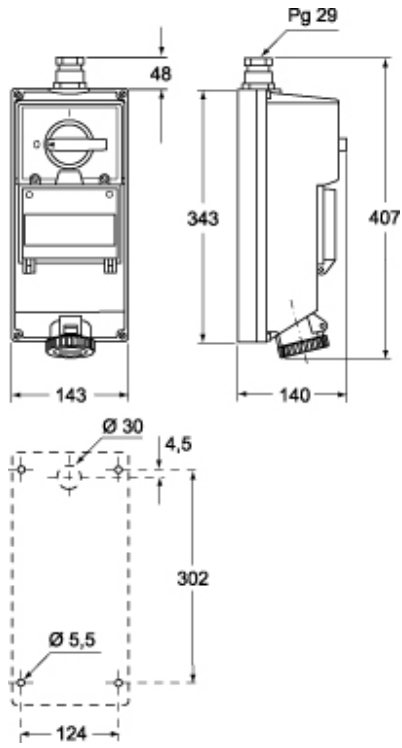

Notes

Dimensions shown in mm are not binding and may be changed without notice.
