


Part number

KI 1645 RI5



Interlocked switched socket-outlet, KI series, 3 poles + N + PE, 4 h (yellow), 16 A, 57/100 ÷ 75/130 V, with compartment for modular units, 7 DIN-rail modules EN 60715

Product description	
Product type	Interlocked switched socket-outlet
Series	KI..RI5
N. of poles	3 poles + N + 
Clock position	4
Size	143x343 fixing plates FC xx53 TB
Cable entry	Pg29
Specification	With compartment for modular units, 7 DIN-rail modules EN 60715
Technical data	
Current	16 A
Voltage	57/100 ÷ 75/130 V
IP degree of protection	IP55
Further technical details	
Weight	1.750,00 g
Operating temperature range (min, max)	-25°C ... +40°C
IK rating (impact degree of protection)	IK10


Material properties	
Colour	RAL 7035 grey, RAL 1021 yellow
Approvals / Standards	
Reference standard	EN 60309-1, -2 e -4
General ordering information	
EAN13 code	8015747048415
Packaging Information	
Sub-packaging weight	1,75 kg
Sub-packaging description	Carton box
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747110327

Part number

KI 1645 RI5



Catalogue drawings

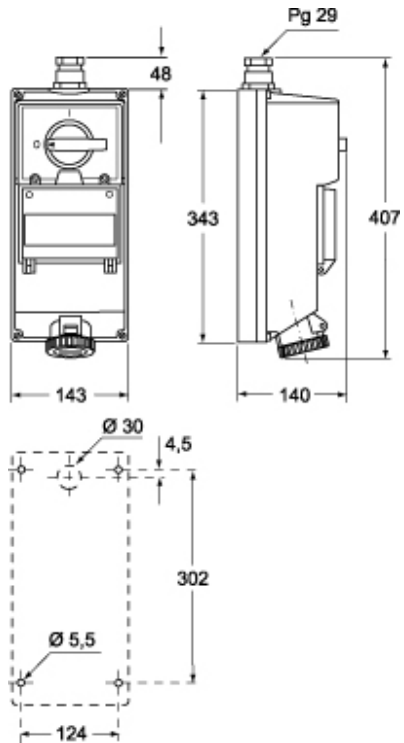

Notes

Dimensions shown in mm are not binding and may be changed without notice.
