

Part number

KI 6364 RI5



Interlocked switched socket-outlet, KI series, 3 poles + PE, 6 h (red), 63 A, 380 ÷ 415 V, with compartment for modular units, 7 DIN-rail modules EN 60715


Product description		Material properties	
Product type	Interlocked switched socket-outlet	Colour	RAL 7035 grey, RAL 3000 red
Series	KI..RI5	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	3 poles + 	China RoHs - EFUP	50
Clock position	6	REACH SVHC substances	Yes
Size	143x343 fixing plates FC xx53 TB	Lead	
Cable entry	Pg29	SCIP number	F6799547-ab84-42f2-938f-233ba663766d
Specification	With compartment for modular units, 7 DIN-rail modules EN 60715	Approvals / Standards	
Technical data		Reference standard	EN 60309-1, -2 e -4
Current	63 A	General ordering information	
Voltage	380 ÷ 415 V	EAN13 code	8015747049641
IP degree of protection	IP55	Packaging Information	
Further technical details		Packaging length	400,00 mm
Weight	2.710,00 g	Packaging height	165,00 mm
Operating temperature range (min, max)	-25°C ... +40°C	Packaging width	170,00 mm
IK rating (impact degree of protection)	IK10	Packaging weight	2,71 kg
		Packaging volume	11,22 dm³
		Packaging description	Carton box
		Packaging quantity	1 Pcs
		Packaging EAN code	8015747049658

Part number

KI 6364 RI5



Catalogue drawings

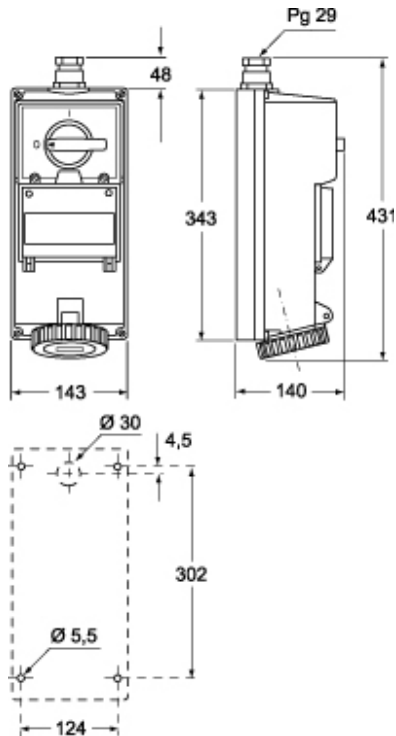

Notes

Dimensions shown in mm are not binding and may be changed without notice.