

Part number

# PE 1633 SV



Mobile plug, PLUSO series, 2 poles + PE, 3 h (white), 16 A, 50 ÷ 250 V, straight

| Product description                    |                                                                                             | Material properties          |                                                                                   |
|----------------------------------------|---------------------------------------------------------------------------------------------|------------------------------|-----------------------------------------------------------------------------------|
| Product type                           | Plug<br>Mobile                                                                              | Colour                       | RAL 7035 grey, RAL 9010 white                                                     |
| Series                                 | PE...SV, PLUSO                                                                              | RoHs conformity              | Compliant with exemption<br>6(c): copper alloy containing up to 4% lead by weight |
| Connection type                        | Screw terminal connection                                                                   | China RoHs - EFUP            | 50                                                                                |
| N. of poles                            | 2 poles +  | REACH SVHC substances        | Yes<br>Lead                                                                       |
| Clock position                         | 3                                                                                           | SCIP number                  | Ca7de37f-add8-4b77-9861-279c94903ade                                              |
| Specification                          | Straight                                                                                    | Approvals / Standards        |                                                                                   |
| Technical data                         |                                                                                             | Reference standard           | EN 60309-1 and -2                                                                 |
| Current                                | 16 A                                                                                        | General ordering information |                                                                                   |
| Voltage                                | > 50 ÷ 250 V                                                                                | EAN13 code                   | 8015747063616                                                                     |
| IP degree of protection                | IP44                                                                                        | Packaging Information        |                                                                                   |
| Further technical details              |                                                                                             | Sub-packaging length         | 175,00 mm                                                                         |
| Weight                                 | 103,00 g                                                                                    | Sub-packaging height         | 100,00 mm                                                                         |
| Operating temperature range (min, max) | -25°C ... +40°C                                                                             | Sub-packaging width          | 235,00 mm                                                                         |
|                                        |                                                                                             | Sub-packaging weight         | 1,03 kg                                                                           |
|                                        |                                                                                             | Sub-packaging volume         | 4,11 dm <sup>3</sup>                                                              |
|                                        |                                                                                             | Sub-packaging description    | Carton box                                                                        |
|                                        |                                                                                             | Sub-packaging quantity       | 10 Pcs                                                                            |
|                                        |                                                                                             | Sub-packaging EAN barcode    | 8015747063623                                                                     |


Part number

# PE 1633 SV



Catalogue drawings

(16 / 32A) PE ... SV

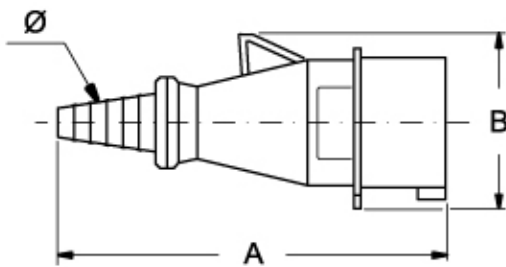

| PE ... SV |        | A     | B  | Ø min | Ø max |
|-----------|--------|-------|----|-------|-------|
| 16A       | 2P+⊕   | 143,5 | 59 | 7     | 17    |
|           | 3P+⊕   | 148,5 | 66 | 7     | 17    |
|           | 3P+N+⊕ | 167,5 | 75 | 9     | 22    |
| 32A       | 2P+⊕   | 187   | 80 | 9     | 22    |
|           | 3P+⊕   | 187   | 80 | 9     | 22    |
|           | 3P+N+⊕ | 192,5 | 87 | 9     | 22    |

## Notes

Dimensions shown in mm are not binding and may be changed without notice.