


Part number

PE 1663 PI



Flush-mounting socket outlet, PLUSO series, 2 poles + PE, 6 h (blue), 16 A, 200 ÷ 250 V, inclined

Product description		Material properties	
Product type	Socket Flush-mounting	Colour	RAL 7035 grey, RAL 5015 blue
Series	PE...PI, PLUSO	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	2 poles + 	China RoHs - EFUP	50
Clock position	6	REACH SVHC substances	Yes Lead
Size	Fixing centre distance socket 52 x 60 mm	SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade
Specification	Inclined	Approvals / Standards	
Technical data		Reference standard	EN 60309-1 and -2
Current	16 A	General ordering information	
Voltage	200 ÷ 250 V	EAN13 code	8015747064354
IP degree of protection	IP44	Packaging Information	
Further technical details		Packaging length	280,00 mm
Weight	115,00 g	Packaging height	196,00 mm
Operating temperature range (min, max)	-25°C ... +40°C	Packaging width	280,00 mm
		Packaging weight	2,66 kg
		Packaging volume	15,37 dm ³
		Packaging description	Carton box
		Packaging quantity	20 Pcs
		Packaging EAN code	8015747064361


Part number

PE 1663 PI



Catalogue drawings

(16 / 32A) PE ... PI

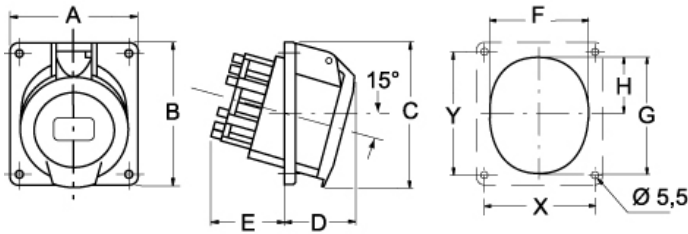

PE ... PI	A	B	C	D	E	F	G	H	X	Y
16A 2P+⊕	64	82	82	38	46	52	62	30	52	60
	64	82	82	42	47	57	65	28	52	60
	92	100	100	43	47	66	78	37,5	77	85
32A 2P+⊕	92	100	100	40	55	68	76	35,5	77	85
	92	100	100	40	55	68	76	35,5	77	85
	92	102	102	43	55	74	86	39,5	77	85

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage
- Flange with anti-ageing gasket
- PE...PI types (IP44), spring lid
- PEW...PI types (IP67), spring lid with locking ring and gasket
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts, available on request for 16A and 32A (standard on 63A and 125A). For the code of products with nickel-plated contacts (socket holes, plug pins), add "N" to the pre-code of the corresponding standard product code; for example: PE becomes PEN and PEW becomes PEWN.
- IP44 and IP67 degrees of protection (EN 60529)