


Part number

PE 1665 SV



Mobile plug, PLUSO series, 3 poles + N + PE, 6 h (red), 16 A, 380 ÷ 415 V, straight

Product description		Material properties	
Product type	Plug Mobile	Colour	RAL 7035 grey, RAL 3000 red
Series	PE...SV, PLUSO	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
Connection type	Screw terminal connection	China RoHs - EFUP	50
N. of poles	3 poles + N + 	REACH SVHC substances	Yes Lead
Clock position	6	SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade
Specification	Straight	Approvals / Standards	
Technical data		Reference standard	EN 60309-1 and -2
Current	16 A	General ordering information	
Voltage	380 ÷ 415 V	EAN13 code	8015747064897
IP degree of protection	IP44	Packaging Information	
Further technical details		Packaging length	400,00 mm
Weight	160,00 g	Packaging height	200,00 mm
Operating temperature range (min, max)	-25°C ... +40°C	Packaging width	400,00 mm
		Packaging weight	8,30 kg
		Packaging volume	32,00 dm ³
		Packaging description	Carton box
		Packaging quantity	50 Pcs
		Packaging EAN code	8015747064903


Part number

PE 1665 SV



Catalogue drawings

(16 / 32A) PE ... SV

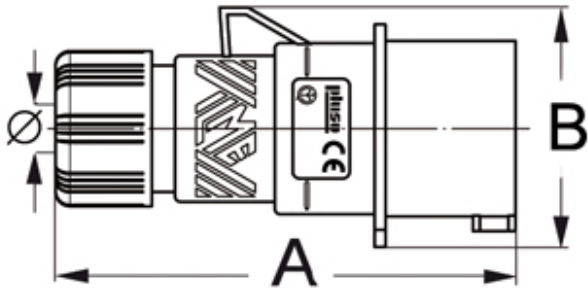

PE...SV	A	B	ø min	ø max
16A 2P+⊕	129	59,5	7	16
3P+⊕	129	67	7	16
3P+N+⊕	129	75	8	24
32A 2P+⊕	150	81	8	24
3P+⊕	150	81	8	24
3P+N+⊕	150	90	8	24

Notes

Dimensions shown in mm are not binding and may be changed without notice.