


Part number

PE 1675 SV



Mobile plug, PLUSO series, 3 poles + N + PE, 7 h (black), 16 A, 277/480 ÷ 288/500 V, straight

Product description

Product type	Plug Mobile
Series	PE...SV, PLUSO
Connection type	Screw terminal connection
N. of poles	3 poles + N + 
Clock position	7
Specification	Straight

Technical data

Current	16 A
Voltage	277/480 ÷ 288/500 V
IP degree of protection	IP44

Further technical details

Weight	148,50 g
Operating temperature range (min, max)	-25°C ... +40°C

Material properties

Colour	RAL 7035 grey, RAL 9005 black
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade

Approvals / Standards

Reference standard	EN 60309-1 and -2
---------------------------	-------------------

General ordering information

EAN13 code	8015747065238
-------------------	---------------

Packaging Information

Packaging length	208,00 mm
Packaging height	140,00 mm
Packaging width	290,00 mm
Packaging weight	1,72 kg
Packaging volume	8,44 dm ³
Packaging description	Carton box
Packaging quantity	10 Pcs
Packaging EAN code	8015747034548


Part number

PE 1675 SV



Catalogue drawings

(16 / 32A) PE ... SV

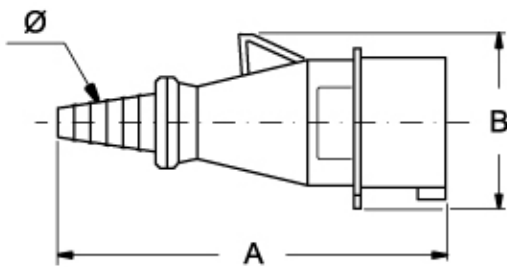

PE ... SV	A	B	Ø min	Ø max	
16A 2P+⊕	143,5	59	7	17	
	3P+⊕	148,5	66	7	17
	3P+N+⊕	167,5	75	9	22
32A 2P+⊕	187	80	9	22	
	3P+⊕	187	80	9	22
	3P+N+⊕	192,5	87	9	22

Notes

Dimensions shown in mm are not binding and may be changed without notice.