


Part number

PE 3265 PI



Flush-mounting socket outlet, PLUSO series, 3 poles + N + PE, 6 h (red), 32 A, 380 ÷ 415 V, inclined

Product description		Material properties	
Product type	Socket Flush-mounting	Colour	RAL 7035 grey, RAL 3000 red
Series	PE...PI, PLUSO	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
Connection type	Screw terminal connection	China RoHs - EFUP	50
N. of poles	3 poles + N + 	REACH SVHC substances	Yes Lead
Clock position	6	SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade
Size	Socket fixing centre distance 77 x 85 mm	Approvals / Standards	
Specification	Inclined	Reference standard	EN 60309-1 and -2
Technical data		General ordering information	
Current	32 A	EAN13 code	8015747067454
Voltage	380 ÷ 415 V	Packaging Information	
IP degree of protection	IP44	Packaging length	330,00 mm
Further technical details		Packaging height	175,00 mm
Weight	222,00 g	Packaging width	295,00 mm
Operating temperature range (min, max)	-25°C ... +40°C	Packaging weight	2,50 kg
		Packaging volume	17,04 dm ³
		Packaging description	Carton box
		Packaging quantity	10 Pcs
		Packaging EAN code	8015747067461


Part number

PE 3265 PI



Catalogue drawings

(16 / 32A) PE ... PI

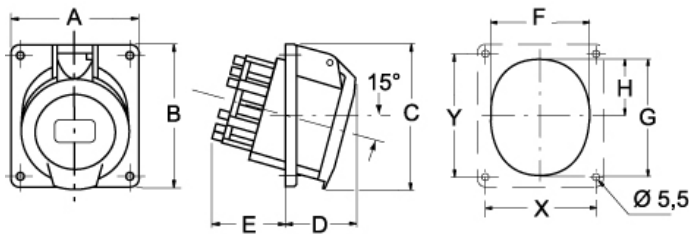

PE ... PI	A	B	C	D	E	F	G	H	X	Y
16A 2P+⊕	64	82	82	38	46	52	62	30	52	60
	64	82	82	42	47	57	65	28	52	60
	92	100	100	43	47	66	78	37,5	77	85
32A 2P+⊕	92	100	100	40	55	68	76	35,5	77	85
	92	100	100	40	55	68	76	35,5	77	85
	92	102	102	43	55	74	86	39,5	77	85

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage
- Flange with anti-ageing gasket
- PE...PI types (IP44), spring lid
- PEW...PI types (IP67), spring lid with locking ring and gasket
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts, available on request for 16A and 32A (standard on 63A and 125A). For the code of products with nickel-plated contacts (socket holes, plug pins), add "N" to the pre-code of the corresponding standard product code; for example: PE becomes PEN and PEW becomes PEWN.
- IP44 and IP67 degrees of protection (EN 60529)