


Part number

PE 3265 PV



Mobile socket outlet, PLUSO series, 3 poles + N + PE, 6 h (red), 32 A, 380 ÷ 415 V

Product description		Material properties	
Product type	Socket Mobile	Colour	RAL 7035 grey, RAL 3000 red
Series	PE...PV, PLUSO	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
Connection type	Screw terminal connection	China RoHs - EFUP	50
N. of poles	3 poles + N + 	REACH SVHC substances	Yes Lead
Clock position	6	SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade
Technical data		Approvals / Standards	
Current	32 A	Reference standard	EN 60309-1 and -2
Voltage	380 ÷ 415 V	General ordering information	
IP degree of protection	IP44	EAN13 code	8015747067515
Further technical details		Packaging Information	
Weight	275,00 g	Packaging length	275,00 mm
Operating temperature range (min, max)	-25°C ... +40°C	Packaging height	230,00 mm
		Packaging width	275,00 mm
		Packaging weight	3,02 kg
		Packaging volume	17,39 dm ³
		Packaging description	Carton box
		Packaging quantity	10 Pcs
		Packaging EAN code	8015747067522


Part number

PE 3265 PV



Catalogue drawings

(16 / 32A) PE ... PV

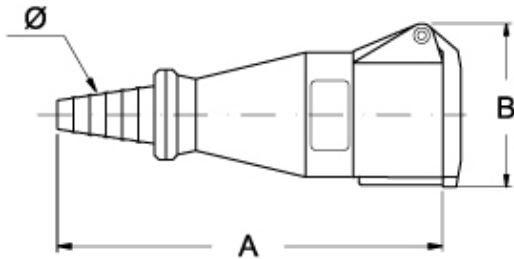

PE...PV	A	B	Ø min	Ø max
16A 2P+⊕	157,5	68	7	17
3P+⊕	164,5	76	7	17
3P+N+⊕	183,5	83	9	22
32A 2P+⊕	200,5	87	9	22
3P+⊕	200,5	87	9	22
3P+N+⊕	200,5	91	9	22

Notes

Dimensions shown in mm are not binding and may be changed without notice.