

Part number

PES 1665 PV



Mobile socket outlet, PLUSO series, SQUICH® quick connection, 3 poles + N + PE, 6 h (red), 16 A, 380 ÷ 415 V

Product description

Product type	Socket Mobile
Series	PES....PV, PLUSO SQUICH®
Connection type	SQUICH® quick connection
N. of poles	3 poles + N + 
Clock position	6

Technical data

Current	16 A
Voltage	380 ÷ 415 V
IP degree of protection	IP44
Further technical details	
Weight	201,00 g
Operating temperature range (min, max)	-25°C ... +40°C

Material properties

Colour	RAL 7035 grey, RAL 3000 red
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade

Approvals / Standards

Reference standard	EN 60309-1 and -2
---------------------------	-------------------

General ordering information

EAN13 code	8015747111836
-------------------	---------------

Packaging Information


Packaging length	400,00 mm
Packaging height	300,00 mm
Packaging width	400,00 mm
Packaging weight	10,15 kg
Packaging volume	48,00 dm³
Packaging description	Carton box
Packaging quantity	50 Pcs
Packaging EAN code	8015747112970

Part number

PES 1665 PV



Catalogue drawings

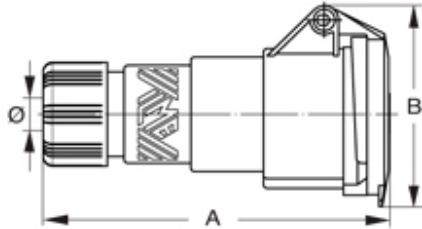

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- PES...PV types (IP44), RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage, entry with cable gland
- PESW...PV types (IP66/IP67), RAL 7035 grey enclosure, spring lid with locking ring and gasket colour coded according to the operating voltage, entry with cable gland
- Terminals with retained screws
- IP44 and IP66/IP67 degrees of protection (EN 60529)

