

Part number

# PES 1665 SV



Mobile plug, PLUSO series, SQUICH® quick connection, 3 poles + N + PE, 6 h (red), 16 A, 380 ÷ 415 V, straight


| Product description                    |                                                                                                 | Material properties          |                                                                                |
|----------------------------------------|-------------------------------------------------------------------------------------------------|------------------------------|--------------------------------------------------------------------------------|
| Product type                           | Plug<br>Mobile                                                                                  | Colour                       | RAL 7035 grey, RAL 3000 red                                                    |
| Series                                 | PES....SV, PLUSO                                                                                | RoHs conformity              | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| Connection type                        | SQUICH® quick connection                                                                        | China RoHs - EFUP            | 50                                                                             |
| N. of poles                            | 3 poles + N +  | REACH SVHC substances        | Yes<br>Lead                                                                    |
| Clock position                         | 6                                                                                               | SCIP number                  | Ca7de37f-add8-4b77-9861-279c94903ade                                           |
| Specification                          | Straight                                                                                        | Approvals / Standards        |                                                                                |
| Technical data                         |                                                                                                 | Reference standard           | EN 60309-1 and -2                                                              |
| Current                                | 16 A                                                                                            | General ordering information |                                                                                |
| Voltage                                | 380 ÷ 415 V                                                                                     | EAN13 code                   | 8015747127790                                                                  |
| IP degree of protection                | IP44                                                                                            | Packaging Information        |                                                                                |
| Further technical details              |                                                                                                 | Packaging length             | 400,00 mm                                                                      |
| Weight                                 | 161,00 g                                                                                        | Packaging height             | 200,00 mm                                                                      |
| Operating temperature range (min, max) | -25°C ... +40°C                                                                                 | Packaging width              | 400,00 mm                                                                      |
|                                        |                                                                                                 | Packaging weight             | 8,15 kg                                                                        |
|                                        |                                                                                                 | Packaging volume             | 32,00 dm³                                                                      |
|                                        |                                                                                                 | Packaging description        | Carton box                                                                     |
|                                        |                                                                                                 | Packaging quantity           | 50 Pcs                                                                         |
|                                        |                                                                                                 | Packaging EAN code           | 8015747127806                                                                  |

Part number

# PES 1665 SV



## Catalogue drawings

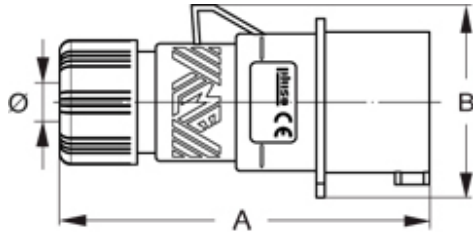

## Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and locking ring in insulating, thermoplastic, self-extinguishing material
- PES...SV types (IP44), entry with cable gland colour coded according to the operating voltage, RAL 7035 grey enclosure
- PESW...SV types (IP66/IP67), entry with cable gland colour coded according to the operating voltage, RAL 7035 grey enclosure, locking ring with gasket colour coded according to operating voltage
- Terminals with retained screws
- IP44 and IP66/IP67 degrees of protection (EN 60529)

