


Part number

PESW 1664 PV



Mobile socket outlet, PLUSO series, SQUICH® quick connection, 3 poles + PE, 6 h (red), 16 A, 380 ÷ 415 V

Product description

Product type	Socket Mobile
Series	PESW...PV, PLUSO SQUICH®
Connection type	SQUICH® quick connection
N. of poles	3 poles + 
Clock position	6

Technical data

Current	16 A
Voltage	380 - 415 V
IP degree of protection	IP66 / IP67

Further technical details

Weight	204,00 g
Operating temperature range (min, max)	-25°C ... +40°C

Material properties

Colour	RAL 7035 grey, RAL 3000 red
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade

Approvals / Standards

Reference standard	EN 60309-1 and -2
---------------------------	-------------------

General ordering information

EAN13 code	8015747128827
-------------------	---------------

Packaging Information


Packaging length	285,00 mm
Packaging height	170,00 mm
Packaging width	190,00 mm
Packaging weight	2,14 kg
Packaging volume	9,21 dm ³
Packaging description	Carton box
Packaging quantity	10 Pcs
Packaging EAN code	8015747163811

Part number

PESW 1664 PV



Catalogue drawings

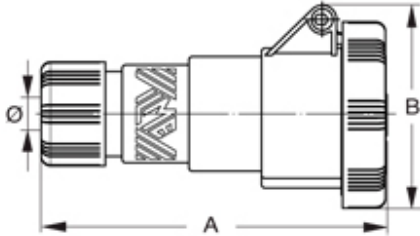

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- PES...PV types (IP44), RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage, entry with cable gland
- PESW...PV types (IP66/IP67), RAL 7035 grey enclosure, spring lid with locking ring and gasket colour coded according to the operating voltage, entry with cable gland
- Terminals with retained screws
- IP44 and IP66/IP67 degrees of protection (EN 60529)

