### Part number

# PEW 12543 PP





Wall-mounting socket outlet, PLUSO series, 2 poles + PE, 4 h (yellow), 125 A, 100  $\div$  130 V

Product description	
Product type	Socket Wall-mounting
Series	PEWPP, PLUSO
N. of poles	2 poles + 🖶
Clock position	4
Technical data	
Current	125 A
Voltage	100 ÷ 130 V
IP degree of protection	IP67
Further technical details	
Operating temperature range (min, max)	-25°C +40°C

Material properties	
Colour	RAL 7035 grey, RAL 1021 yellow
Approvals / Standards	
Reference standard	EN 60309-1 and -2
General ordering information	
EAN13 code	8015747156080


#### Part number


## PEW 12543 PP




#### Catalogue drawings

#### (63A) PEW ... PP





#### (125A) PEW ... PP

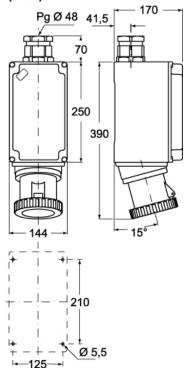

#### **Notes**

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage
- PE...PP types (IP44), spring lid, entry with threaded grommet (replaceable with a cable gland)
- PEW...PP types (IP67), spring lid with locking ring and gasket, entry with cable gland
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts, available on request for 16A and 32A (standard on 63A and 125A). For the code of products with nickel-plated contacts (socket holes, plug pins), add "N" to the pre-code of the corresponding standard product code; for example: PE becomes PEN and PEW becomes PEWN.
- 125A: with terminal block for the anchoring of incoming cables, already connected to socket
- IP44 and IP67 degrees of protection (EN 60529)