Part number

PEW 12554 PP





Wall-mounting socket outlet, PLUSO series, 3 poles + PE, 5 h (black), 125 A, $600 \div 690 \text{ V}$

Product description	
Product type	Socket Wall-mounting
Series	PEWPP, PLUSO
N. of poles	3 poles + 🖶
Clock position	5
Technical data	
Current	125 A
Voltage	600 ÷ 690 V
IP degree of protection	IP67
Further technical details	
Operating temperature range (min, max)	-25°C +40°C

Approvals / Standards

Reference standard EN 60309-1 and -2

General ordering information

EAN13 code 8015747156172


Part number


PEW 12554 PP




Catalogue drawings

(63A) PEW ... PP





(125A) PEW ... PP

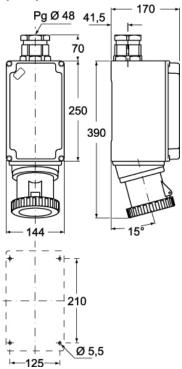

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage
- PE...PP types (IP44), spring lid, entry with threaded grommet (replaceable with a cable gland)
- PEW...PP types (IP67), spring lid with locking ring and gasket, entry with cable gland
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts, available on request for 16A and 32A (standard on 63A and 125A). For the code of products with nickel-plated contacts (socket holes, plug pins), add "N" to the pre-code of the corresponding standard product code; for example: PE becomes PEN and PEW becomes PEWN.
- 125A: with terminal block for the anchoring of incoming cables, already connected to socket
- IP44 and IP67 degrees of protection (EN 60529)