


Part number

PEW 12555 PQ



Flush-mounting socket outlet, PLUSO series, 3 poles + N + PE, 5 h (black), 125 A, 347/600 ÷ 400/690 V, straight

Product description

Product type	Socket Flush-mounting
Series	PEW...PQ, PLUSO
N. of poles	3 poles + N + 
Clock position	5
Specification	Straight

Technical data

Current	125 A
Voltage	347/600 ÷ 400/690 V
IP degree of protection	IP67

Further technical details

Weight	1.680,00 g
Operating temperature range (min, max)	-25°C ... +40°C

Material properties

Colour	RAL 7035 grey, RAL 9005 black
---------------	-------------------------------

Approvals / Standards

Reference standard	EN 60309-1 and -2
---------------------------	-------------------

General ordering information

EAN13 code	8015747156233
-------------------	---------------

Packaging Information

Packaging length	150,00 mm
Packaging height	140,00 mm
Packaging width	180,00 mm
Packaging weight	1,80 kg
Packaging description	Carton box
Packaging quantity	1 Pcs
Packaging EAN code	8015747301718


Part number

PEW 12555 PQ



Catalogue drawings

(63 / 125A) PEW ... PQ

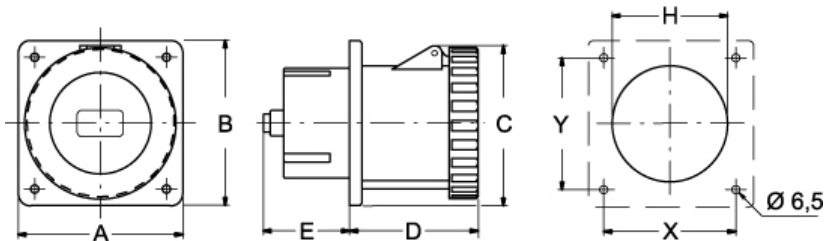

PEW ... PQ	A	B	C	D	E	H	X	Y	
63A 2P+⊕	100	107	109	92	30	73	77	85	
	100	107	109	92	30	73	77	85	
	3P+N+⊕	100	107	109	92	30	73	77	85
125A 2P+⊕	130	130	130	101	68	91	104	104	
	3P+⊕	130	130	130	101	68	91	104	104
	3P+N+⊕	130	130	130	101	68	91	104	104

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage
- Flange with anti-ageing gasket
- PE...PQ types (IP44), spring lid
- PEW...PQ types (IP67), spring lid with locking ring and gasket
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts, available on request for 16A and 32A (standard on 63A and 125A). For the code of products with nickel-plated contacts (socket holes, plug pins), add "N" to the pre-code of the corresponding standard product code; for example: PE becomes PEN and PEW becomes PEWN.
- IP44 and IP67 degrees of protection (EN 60529)