


Part number

PEW 12555 SM



Wall-mounting plug, PLUSO series, 3 poles + N + PE, 5 h (black), 125 A, 347/600 ÷ 400/690 V

Product description

| | |
|-----------------------|---|
| Product type | Plug Wall-mounting |
| Series | PEW...SM, PLUSO |
| N. of poles | 3 poles + N +  |
| Clock position | 5 |

Technical data

| | |
|--------------------------------|---------------------|
| Current | 125 A |
| Voltage | 347/600 ÷ 400/690 V |
| IP degree of protection | IP67 |

Further technical details

| | |
|---|-----------------|
| Weight | 4.399,00 g |
| Operating temperature range (min, max) | -25°C ... +40°C |

Material properties

| | |
|------------------------------|--|
| Colour | RAL 7035 grey, RAL 9005 black |
| RoHs conformity | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| China RoHs - EFUP | 50 |
| REACH SVHC substances | Yes Lead |
| SCIP number | Ca7de37f-add8-4b77-9861-279c94903ade |

Approvals / Standards

| | |
|---------------------------|-------------------|
| Reference standard | EN 60309-1 and -2 |
|---------------------------|-------------------|

General ordering information

| | |
|-------------------|---------------|
| EAN13 code | 8015747156257 |
|-------------------|---------------|

Packaging Information

| | |
|------------------------------|-----------------------|
| Packaging length | 170,00 mm |
| Packaging height | 190,00 mm |
| Packaging width | 400,00 mm |
| Packaging weight | 4,40 kg |
| Packaging volume | 12,92 dm ³ |
| Packaging description | Carton box |
| Packaging quantity | 1 Pcs |
| Packaging EAN code | 8015747221887 |


Part number

PEW 12555 SM




Catalogue drawings

(63A) PEW ... SM

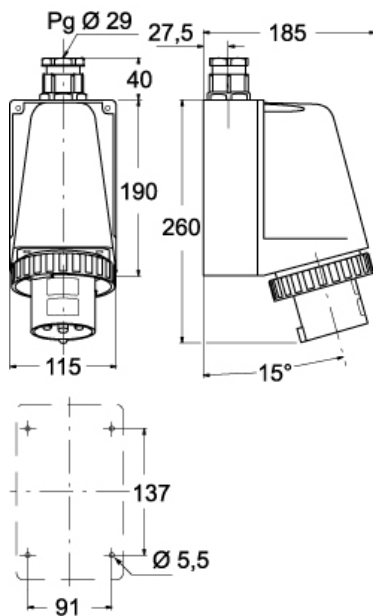

(125A) PEW ... SM

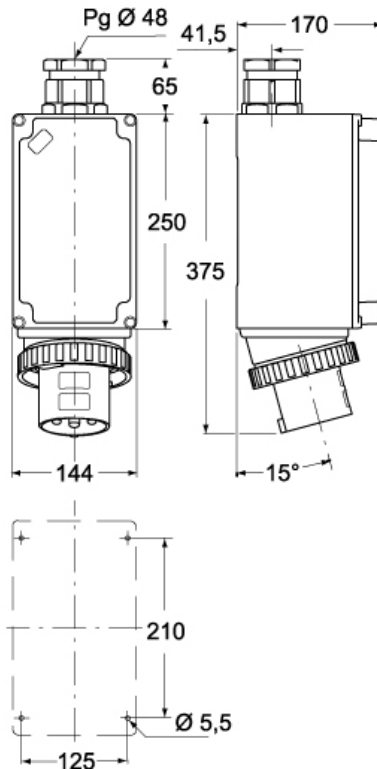

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and locking ring in insulating, thermoplastic, self-extinguishing material
- PE...SM types (IP44), enclosure colour coded according to the operating voltage, top entry with threaded grommet (replaceable with cable gland)
- PEW...SM types (IP67), RAL 7035 grey enclosure, locking ring with gasket colour coded according to the operating voltage, top entry with cable gland
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts, available on request for 16A and 32A (standard on 63A and 125A). For the code of products with nickel-plated contacts (socket holes, plug pins), add "N" to the pre-code of the corresponding standard product code; for example: PE becomes PEN and PEW becomes PEWN.
- 125A: with terminal block for the anchoring of incoming cables, already connected to socket
- IP44 and IP67 degrees of protection (EN 6052)