


Part number

PEW 12593 PP



Wall-mounting socket outlet, PLUSO series, 2 poles + PE, 9 h (red), 125 A, 380 ÷ 415 V

Product description		Material properties	
Product type	Socket Wall-mounting	Colour	RAL 7035 grey, RAL 3000 red
Series	PEW...PP, PLUSO	Approvals / Standards	
N. of poles	2 poles + 	Reference standard	EN 60309-1 and -2
Clock position	9	General ordering information	
Technical data		EAN13 code	8015747071079
Current	125 A	Packaging Information	
Voltage	380 ÷ 415 V	Packaging weight	3,90 kg
IP degree of protection	IP67	Packaging description	Carton box
Further technical details		Packaging quantity	1 Pcs
Weight	3.732,00 g	Packaging EAN code	8015747111935
Operating temperature range (min, max)	-25°C ... +40°C		


Part number

PEW 12593 PP




Catalogue drawings

(63A) PEW ... PP

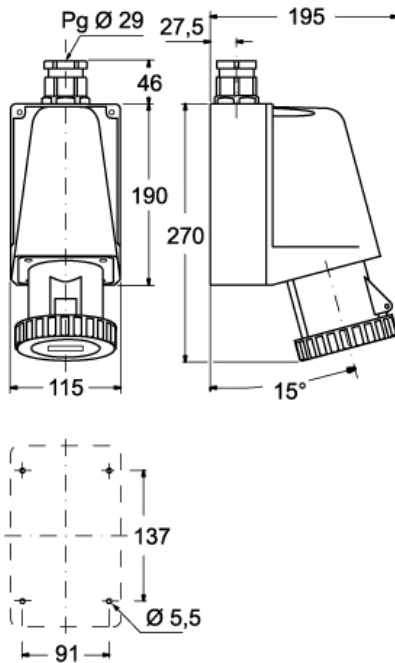

(125A) PEW ... PP

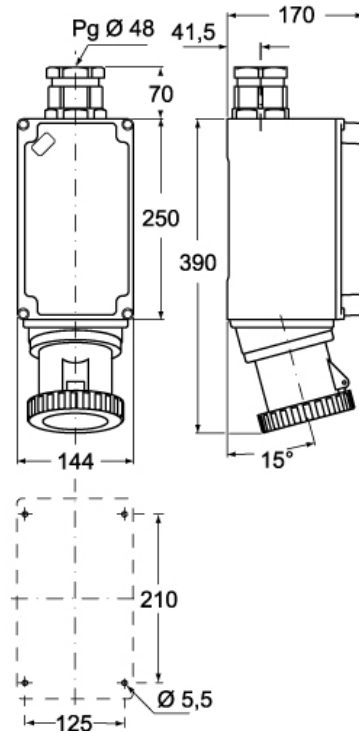

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage
- PE...PP types (IP44), spring lid, entry with threaded grommet (replaceable with a cable gland)
- PEW...PP types (IP67), spring lid with locking ring and gasket, entry with cable gland
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts, available on request for 16A and 32A (standard on 63A and 125A). For the code of products with nickel-plated contacts (socket holes, plug pins), add "N" to the pre-code of the corresponding standard product code; for example: PE becomes PEN and PEW becomes PEWN.
- 125A: with terminal block for the anchoring of incoming cables, already connected to socket
- IP44 and IP67 degrees of protection (EN 60529)