


Part number

# PEW 3273 PI



Flush-mounting socket outlet, PLUSO series, 2 poles + PE, 7 h (black), 32 A, 480 ÷ 500 V, inclined

#### Product description

|                       |   |
|-----------------------|---|
| <b>Product type</b>   | Socket<br>Flush-mounting  |
| <b>Series</b>         | PEW...PI, PLUSO   |
| <b>N. of poles</b>    | 2 poles +  |
| <b>Clock position</b> | 7   |
| <b>Specification</b>  | Inclined  |

#### Technical data

|                                |             |
|--------------------------------|-------------|
| <b>Current</b>                 | 32 A        |
| <b>Voltage</b>                 | 480 ÷ 500 V |
| <b>IP degree of protection</b> | IP67        |

#### Further technical details

|   |                 |
|---|-----------------|
| <b>Weight</b>                                 | 235,00 g        |
| <b>Operating temperature range (min, max)</b> | -25°C ... +40°C |

#### Material properties

|               |                               |
|---------------|-------------------------------|
| <b>Colour</b> | RAL 7035 grey, RAL 9005 black |
|---------------|-------------------------------|

#### Approvals / Standards

|                           |                   |
|---------------------------|-------------------|
| <b>Reference standard</b> | EN 60309-1 and -2 |
|---------------------------|-------------------|

#### General ordering information

|                   |               |
|-------------------|---------------|
| <b>EAN13 code</b> | 8015747075701 |
|-------------------|---------------|

#### Packaging Information

|                              |               |
|------------------------------|---------------|
| <b>Packaging weight</b>      | 2,72 kg       |
| <b>Packaging description</b> | Carton box    |
| <b>Packaging quantity</b>    | 10 Pcs        |
| <b>Packaging EAN code</b>    | 8015747111867 |


Part number

# PEW 3273 PI



Catalogue drawings

(16 / 32A) PEW ... PI

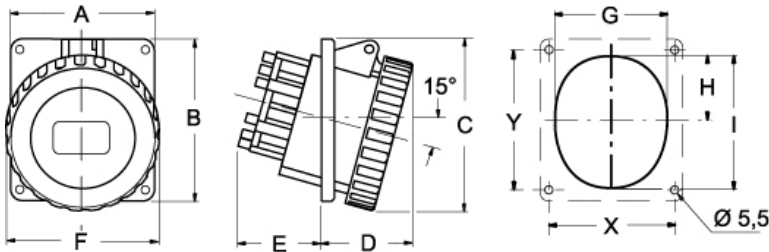

| PEW ... PI | A      | B  | C   | D   | E  | F  | G   | H  | I    | X  | Y  |    |
|------------|--------|----|-----|-----|----|----|-----|----|------|----|----|----|
| <b>16A</b> | 2P+⊕   | 65 | 82  | 83  | 48 | 35 | 70  | 50 | 29   | 58 | 52 | 60 |
|            | 3P+⊕   | 65 | 82  | 87  | 48 | 37 | 78  | 58 | 30   | 65 | 52 | 60 |
|            | 3P+N+⊕ | 90 | 100 | 102 | 50 | 38 | 86  | 66 | 35   | 75 | 77 | 85 |
| <b>32A</b> | 2P+⊕   | 90 | 100 | 116 | 50 | 50 | 92  | 68 | 37   | 78 | 77 | 85 |
|            | 3P+⊕   | 90 | 100 | 116 | 50 | 50 | 92  | 68 | 37   | 78 | 77 | 85 |
|            | 3P+N+⊕ | 90 | 100 | 118 | 50 | 50 | 100 | 73 | 42.5 | 86 | 77 | 85 |

## Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage
- Flange with anti-ageing gasket
- PE...PI types (IP44), spring lid
- PEW...PI types (IP67), spring lid with locking ring and gasket
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts, available on request for 16A and 32A (standard on 63A and 125A). For the code of products with nickel-plated contacts (socket holes, plug pins), add "N" to the pre-code of the corresponding standard product code; for example: PE becomes PEN and PEW becomes PEWN.
- IP44 and IP67 degrees of protection (EN 60529)