## Part number PEW 3273 PQ





Flush-mounting socket outlet, PLUSO series, 2 poles + PE, 7 h (black), 32 A, 480 ÷ 500 V, straight

oduct description		Material properties		
Product type	Socket	Colour	RAL 7035 grey, RAL 9005 black	
Floudet type	Flush-mounting	Approvals / Standards		
Series	PEWPQ, PLUSO	Reference standard	EN 60309-1 and -2	
N. of poles	2 poles + 🖨	General ordering information		
Clock position	7	EAN13 code	8015747158015	
Specification	Straight			
Technical data				
Current	32 A			
Voltage	480 ÷ 500 V			
IP degree of protection	IP67			
Further technical details				
Operating temperature				

Operating temperature range (min, max)


-25°C ... +40°C





## Catalogue drawings

## (16 / 32A) PEW ... PQ

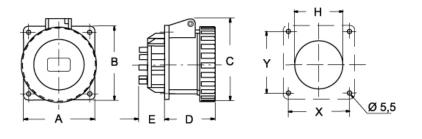

PEW	PQ	Α	в	С	D	E	н	х	Y
16A	2P+⊕	65	65	77	52	27	60	52	52
	3P+⊕	65	65	85	52	27	61,5	52	52
	3P+N+⊕	80	80	93	52	27	70	60	60
32A	2P+⊕	80	80	98	62	28	68	60	60
	3P+⊕	80	80	98	62	28	68	60	60
	3P+N+⊕	80	80	105	62	28	73	60	60

## Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2

- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material

- RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage  $% \left( {{{\rm{D}}_{{\rm{D}}}}_{{\rm{D}}}} \right)$ 

- Flange with anti-ageing gasket
- PE...PQ types (IP44), spring lid
- PEW...PQ types (IP67), spring lid with locking ring and gasket
- Terminals with retained screws
- 63A, 125A: with pilot contact

- Nickel-plated contacts, available on request for 16A and 32A (standard on 63A and 125A). For the code of products with nickelplated contacts (socket holes, plug pins), add "N" to the pre-code of the corresponding standard product code; for example: PE becomes PEN and PEW becomes PEWN.

- IP44 and IP67 degrees of protection (EN 60529)