Part number

PEW 3283 PI





Flush-mounting socket outlet, PLUSO series, 2 poles + PE, 8 h (white), 32 A, > 250 V, inclined

Product description							
Product type	Socket Flush-mounting						
Series	PEWPI, PLUSO						
N. of poles	2 poles + 🖃						
Clock position	8						
Specification	Inclined						
Technical data							
Current	32 A						
Voltage	> 250 V						
IP degree of protection	IP67						
Further technical details							
Operating temperature range (min, max)	-25°C +40°C						

Material properties					
Colour	RAL 7035 grey, RAL 9010 white				
Approvals / Standards					
Reference standard	EN 60309-1 and -2				
General ordering information					
EAN13 code	8015747158060				


Part number

PEW 3283 PI



Catalogue drawings

(16 / 32A) PEW ... PI

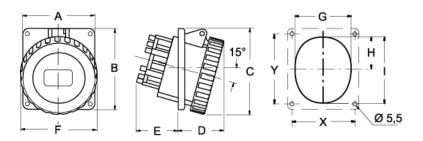

PEW	PI	Α	В	С	D	E	F	G	Н	ı	Х	Υ
16A	2P+⊕	65	82	83	48	35	70	50	29	58	52	60
	3P+⊕	65	82	87	48	37	78	58	30	65	52	60
	3P+N+⊕	90	100	102	50	38	86	66	35	75	77	85
32A	2P+⊕	90	100	116	50	50	92	68	37	78	77	85
	3P+⊕	90	100	116	50	50	92	68	37	78	77	85
	3P+N+⊕	90	100	118	50	50	100	73	42.5	86	77	85

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2 $\,$
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material $% \left(1\right) =\left(1\right) \left(1\right) \left($
- RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage
- Flange with anti-ageing gasket
- PE...PI types (IP44), spring lid
- PEW...PI types (IP67), spring lid with locking ring and gasket
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts, available on request for 16A and 32A (standard on 63A and 125A). For the code of products with nickel-plated contacts (socket holes, plug pins), add "N" to the pre-code of the corresponding standard product code; for example: PE becomes PEN and PEW becomes PEWN.
- IP44 and IP67 degrees of protection (EN 60529)