

Part number

PEW 3295 PV



Mobile socket outlet, PLUSO series, 3 poles + N + PE, 9 h (blue), 32 A, 120/208 ÷ 144/250 V

Product description		Material properties	
Product type	Socket Mobile	Colour	RAL 7035 grey, RAL 5015 blue
Series	PEW...PV, PLUSO	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	3 poles + N + 	China RoHs - EFUP	50
Clock position	9	REACH SVHC substances	Yes Lead
Technical data		SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade
Current	32 A	Approvals / Standards	
Voltage	120/208 ÷ 144/250 V	Reference standard	EN 60309-1 and -2
IP degree of protection	IP67	General ordering information	
Further technical details		EAN13 code	8015747076388
Weight	270,00 g	Packaging Information	
Operating temperature range (min, max)	-25°C ... +40°C	Packaging length	275,00 mm
		Packaging height	230,00 mm
		Packaging width	275,00 mm
		Packaging weight	3,10 kg
		Packaging volume	17,39 dm³
		Packaging description	Carton box
		Packaging quantity	10 Pcs
		Packaging EAN code	8015747076395


Part number

PEW 3295 PV



Catalogue drawings

(16 / 32A) PEW ... PV

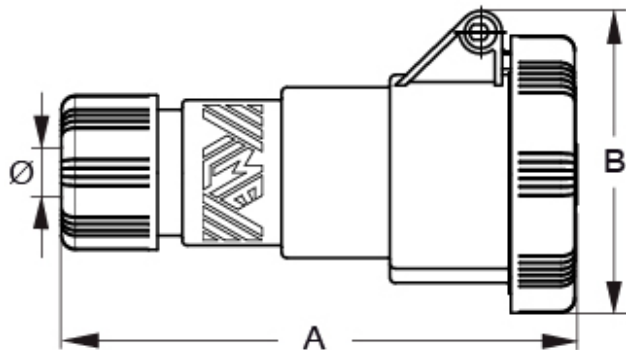

PEW...PV	A	B	ø min	ø max
16A 2P+⊕	145	77	7	16
3P+⊕	145	85	7	16
3P+N+⊕	145	93	8	24
32A 2P+⊕	162	97	8	24
3P+⊕	162	97	8	24
3P+N+⊕	162	105	8	24

Notes

Dimensions shown in mm are not binding and may be changed without notice.

32A only version PHW...PV)

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- PE...PV types 16A and 32A (IP44), RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage, entry with cable gland
- PEW...PV types 16A, 32A, 63A and 125A (IP66/IP67), RAL 7035 grey enclosure, spring lid with locking ring and gasket
- PEW...PV types 63A and 125A (IP67), cable anchoring collar incorporated in the insert
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts standard on 63A and 125A (on 16A and