


Part number

# PEW 63114 SI



Flush-mounting plug, PLUSO series, 3 poles + PE, 11 h (red), 63 A, 440 ÷ 460 V

#### Product description

|                       |   |
|-----------------------|---|
| <b>Product type</b>   | Plug<br>Flush-mounting  |
| <b>Series</b>         | PEW...SI, PLUSO   |
| <b>N. of poles</b>    | 3 poles +  |
| <b>Clock position</b> | 11  |

#### Technical data

|                                |             |
|--------------------------------|-------------|
| <b>Current</b>                 | 63 A        |
| <b>Voltage</b>                 | 440 ÷ 460 V |
| <b>IP degree of protection</b> | IP67        |

#### Further technical details

|   |                 |
|---|-----------------|
| <b>Operating temperature range (min, max)</b> | -25°C ... +40°C |
|---|-----------------|

#### Material properties

|               |                             |
|---------------|-----------------------------|
| <b>Colour</b> | RAL 7035 grey, RAL 3000 red |
|---------------|-----------------------------|

#### Approvals / Standards

|                           |                   |
|---------------------------|-------------------|
| <b>Reference standard</b> | EN 60309-1 and -2 |
|---------------------------|-------------------|

#### General ordering information


|                   |               |
|-------------------|---------------|
| <b>EAN13 code</b> | 8015747158152 |
|-------------------|---------------|

Part number

# PEW 63114 SI



Catalogue drawings

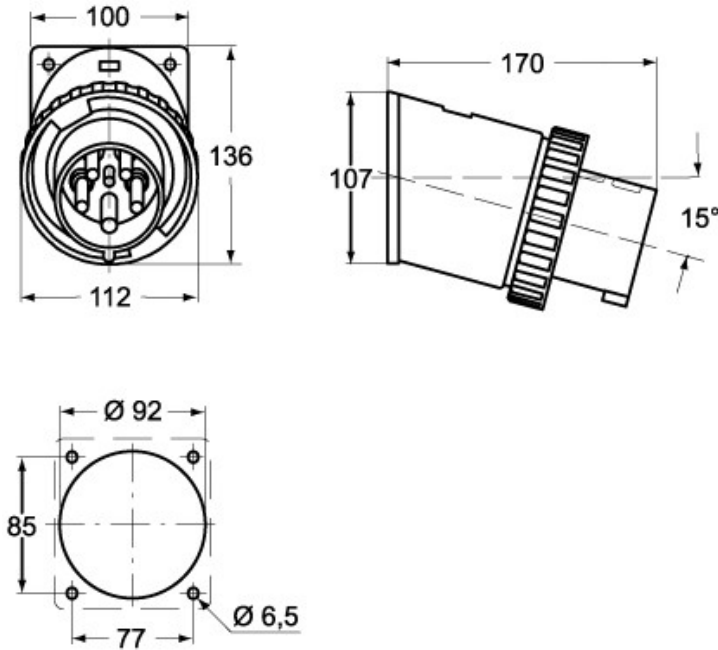

## Notes

Dimensions shown in mm are not binding and may be changed without notice.

- 
- Compliant with EN 60309-1 and -2
  - Enclosure, insert and locking ring in insulating, thermoplastic, self-extinguishing material
  - Flange with anti-ageing gasket
  - PE...SI types (IP44), RAL 7035 grey enclosure, plug mouth colour coded according to the operating voltage
  - PEW...SI (IP67) types, RAL 7035 grey enclosure, locking ring with gasket colour coded according to the operating voltage
  - Terminals with retained screws
  - 63A, 125A: with pilot contact
  - Nickel-plated contacts, available on request for 16A and 32A (standard on 63A and 125A). For the code of products with nickel-plated contacts (socket holes, plug pins), add "N" to the pre-code of the corresponding standard product code; for example: PE becomes PEN and PEW becomes PEWN.
  - IP44 and IP67 degrees of protection (EN 60529)
-