


Part number

# PEW 63115 SI



Flush-mounting plug, PLUSO series, 3 poles + N + PE, 11 h (red), 63 A, 250/440 ÷ 265/460 V

#### Product description

<b>Product type</b>	Plug Flush-mounting
<b>Series</b>	PEW...SI, PLUSO
<b>N. of poles</b>	3 poles + N + 
<b>Clock position</b>	11

#### Technical data

<b>Current</b>	63 A
<b>Voltage</b>	250/440V ÷ 265/460V
<b>IP degree of protection</b>	IP67

#### Further technical details

<b>Weight</b>	602,00 g
<b>Operating temperature range (min, max)</b>	-25°C ... +40°C

#### Material properties

<b>Colour</b>	RAL 7035 grey, RAL 3000 red
<b>RoHs conformity</b>	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
<b>China RoHs - EFUP</b>	50
<b>REACH SVHC substances</b>	Yes Lead
<b>SCIP number</b>	Ca7de37f-add8-4b77-9861-279c94903ade

#### Approvals / Standards

<b>Reference standard</b>	EN 60309-1 and -2
---------------------------	-------------------

#### General ordering information

<b>EAN13 code</b>	8015747076609
-------------------	---------------

#### Packaging Information


<b>Packaging length</b>	255,00 mm
<b>Packaging height</b>	195,00 mm
<b>Packaging width</b>	245,00 mm
<b>Packaging weight</b>	2,65 kg
<b>Packaging volume</b>	12,18 dm <sup>3</sup>
<b>Packaging description</b>	Carton box
<b>Packaging quantity</b>	4 Pcs
<b>Packaging EAN code</b>	8015747076616

Part number

# PEW 63115 SI



Catalogue drawings

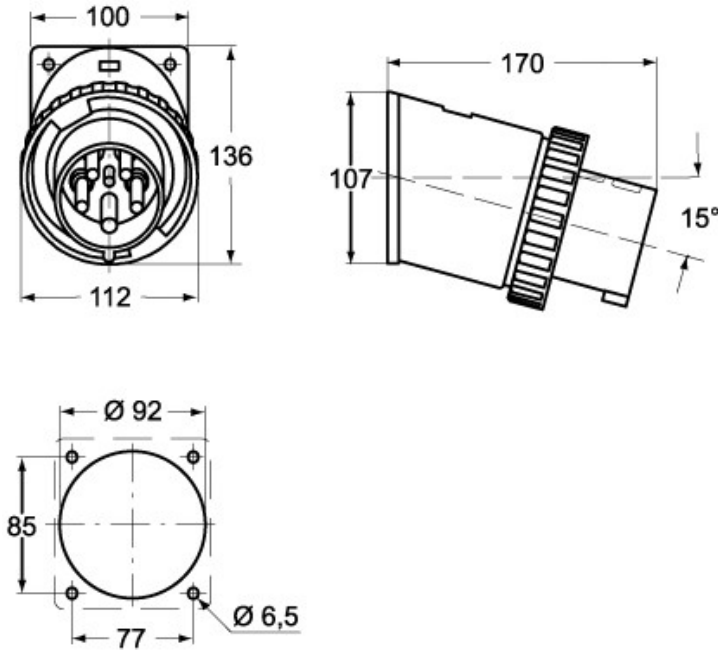

## Notes

Dimensions shown in mm are not binding and may be changed without notice.

- 
- Compliant with EN 60309-1 and -2
  - Enclosure, insert and locking ring in insulating, thermoplastic, self-extinguishing material
  - Flange with anti-ageing gasket
  - PE...SI types (IP44), RAL 7035 grey enclosure, plug mouth colour coded according to the operating voltage
  - PEW...SI (IP67) types, RAL 7035 grey enclosure, locking ring with gasket colour coded according to the operating voltage
  - Terminals with retained screws
  - 63A, 125A: with pilot contact
  - Nickel-plated contacts, available on request for 16A and 32A (standard on 63A and 125A). For the code of products with nickel-plated contacts (socket holes, plug pins), add "N" to the pre-code of the corresponding standard product code; for example: PE becomes PEN and PEW becomes PEWN.
  - IP44 and IP67 degrees of protection (EN 60529)
-