


Part number

PEW 63123 SV



Mobile plug, PLUSO series, 2 poles + PE, 12 h (white), 63 A, straight

Product description

| | |
|-----------------------|---|
| Product type | Plug Mobile |
| Series | PEW...SV, PLUSO |
| N. of poles | 2 poles +  |
| Clock position | 12 |
| Specification | Straight |

Technical data

| | |
|--------------------------------|------------------|
| Current | 63 A |
| Voltage | ins. transformer |
| IP degree of protection | IP67 |

Further technical details

| | |
|---|-----------------|
| Weight | 705,00 g |
| Operating temperature range (min, max) | -25°C ... +40°C |

Material properties

| | |
|------------------------------|--|
| Colour | RAL 7035 grey, RAL 9010 white |
| RoHs conformity | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| China RoHs - EFUP | 50 |
| REACH SVHC substances | Yes Lead |
| SCIP number | Ca7de37f-add8-4b77-9861-279c94903ade |

Approvals / Standards

| | |
|---------------------------|-------------------|
| Reference standard | EN 60309-1 and -2 |
|---------------------------|-------------------|

General ordering information

| | |
|-------------------|---------------|
| EAN13 code | 8015747158268 |
|-------------------|---------------|

Packaging Information

| | |
|------------------------------|----------------------|
| Packaging weight | 1,55 kg |
| Packaging volume | 6,61 dm ³ |
| Packaging description | Carton box |
| Packaging quantity | 2 Pcs |
| Packaging EAN code | 8015747056809 |


Part number

PEW 63123 SV



Catalogue drawings

(63 / 125A) PEW ... SV

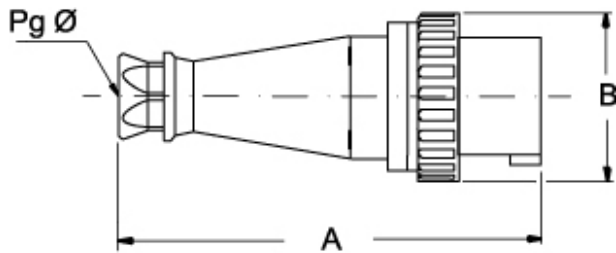

| PEW ... SV | A | B | Pg Ø |
|------------------|-------|-----|--------|
| 63A 2P+⊕ | 264,5 | 112 | 36 |
| 3P+⊕ | 264,5 | 112 | 36 |
| 3P+N+⊕ | 264,5 | 112 | 36 |
| 125A 2P+⊕ | 310 | 130 | 2" gas |
| 3P+⊕ | 310 | 130 | 2" gas |
| 3P+N+⊕ | 310 | 130 | 2" gas |

Notes

Dimensions shown in mm are not binding and may be changed without notice.

32A only version PHW...SV)

- Compliant with EN 60309-1 and -2
- Enclosure, insert and locking ring in insulating, thermoplastic, self-extinguishing material
- PE...SV types 16A and 32A (IP44), entry with cable gland colour coded according to the operating voltage, RAL 7035 grey enclosure
- PEW...SV types 16A and 32A (IP66/IP67), entry with cable gland colour coded according to the operating voltage, RAL 7035 grey enclosure, locking ring with gasket colour coded according to operating voltage
- PEW...SV types 63A and 125A (IP67), entry with cable gland, RAL 7035 grey enclosure, locking ring with gasket colour coded according to operating voltage
- PEW...SV types 63A and 125A (IP67), cable anchoring collar incorporated in the insert
- SIP version with phase inverter (3P+N+E, h6), 16A and 32A
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts standard on 63A and 125A (on 16A and